


WAVECREST



Electronic Sensor Faucet

Architect/Engineering Specifications:

Single hole deck mount electronic sensor faucet with matte black brass gooseneck spout, 0.5 GPM vandal resistant non-aerated spray device, AC/DC control module with internal flow control setting switches, temperature control mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.

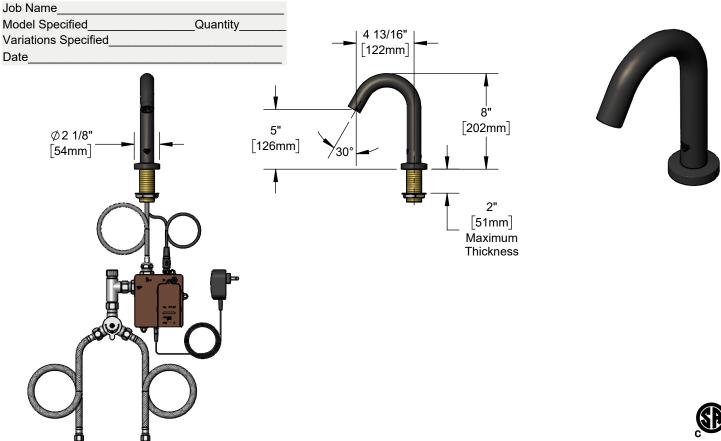

Features & Benefits:

- Single hole deck mount faucet w/ matte black brass gooseneck spout
- 0.5 GPM vandal resistant non-aerated spray device (B-0199-M16-V05)
- Water resistant control module w/ internal flow control switches for adjusting auto time out & shut off delay settings
- Optional auto flush feature flows water for 30 seconds after every 12 inactive hours
- Optional metering mode
- Plug in AC transformer or (4) AA batteries (DC) power options
- Mechanical temperature mixing valve w/ integral check valves
- 18" flexible stainless steel supply hoses w/ 3/8" compression connections
- Material: Matte black brass spout and body

Optional Outlets (M16 Series)			
GPM	VR Aerated	VR Non-Aerated (VR Laminar)	
0.35	N/A	□ B-0199-M16-V035	
0.5	N/A	Standard	
1.0	□ B-0199-M16-V10	N/A	
1.5	□ B-0199-M16-V15	□ B-0199-M16-VL15	

T&S BRASS AND BRONZE WORKS, INC.





- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- UL 1951

Warranty: Three Year (Limited)

Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate: 0.5 GPM [1.9 l/min] @ 60 psi [4.14 bar]
- Water Consumption: @10 sec = .08 gal [.32 L]

@15 sec = .13 gal [.47 L]





