

Swivel/Rigid Sink and Pantry Faucets

S-0300


EVERSTEEL

Double Pantry Faucet

TAG:

Architect/Engineering Specifications:

Single hole stainless steel deck mount mixing faucet, stainless steel 5 3/4" swivel/rigid gooseneck with stream regulator outlet, stainless steel compression cartridges with spring checks, stainless steel lever handles and 18" flexible stainless steel supply hoses with G1/2" connections. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

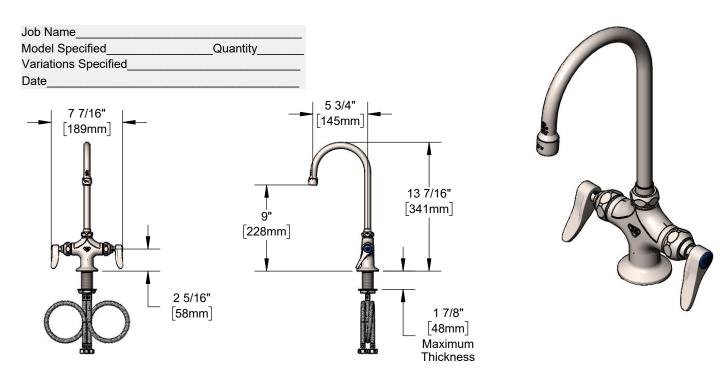

Features & Benefits:

- · All stainless steel construction with brushed finish
- Single hole deck mount mixing faucet w/ stainless steel body
- Stainless steel 5 3/4" swivel/rigid gooseneck. Converts to rigid with included lock washer
- · Stainless steel stream regulator outlet, Series 1
- Stainless steel quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- Stainless steel lever handles w/ color coded indexes
- 18" flexible stainless steel supply hoses w/ G1/2" female swivel connections (compatible w/ 1/2" NPSM threads)
- Material: Stainless steel body, tubular spout, cartridges and handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Performance Data:

Warranty: Lifetime (Limited)

LOW LEAD COMPLIANT



- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40 °F 140 °F [4.44 °C 60 °C]
- Flow Rate: 8.67 GPM [32.82 L/min] @ 60 psi [4.14 bar]

Stainless Steel T&S Swing Nozzles

□ S059X 6" Swing Nozzle□ S060X 8" Swing Nozzle

□ S062X 12" Swing Nozzle

Stainless Steel T&S Swivel Goosenecks (D x K)

□ S133X 5 11/16" x 6 1/4" Swivel Gooseneck (Standard)







T&S BRASS AND BRONZE WORKS, INC.

