
TAG:

Bedpan Washer

## **Architect/Engineering Specifications:**

Wall mount double pedal valve with 1/2" NPT female angled loose key stop inlets, 3/8" NPT female angled loose key stop volume control outlet, elevated atmospheric vacuum breaker with 3/8" NPT female inlet and outlet, wall hook outlet with 3/8 NPT female inlet, 54" PVC hose with heat resistant handle and extended nozzle with 2.2 GPM rosespray. Certified to ASME A112.18.1/CSA B125.1 and ASSE 1001.



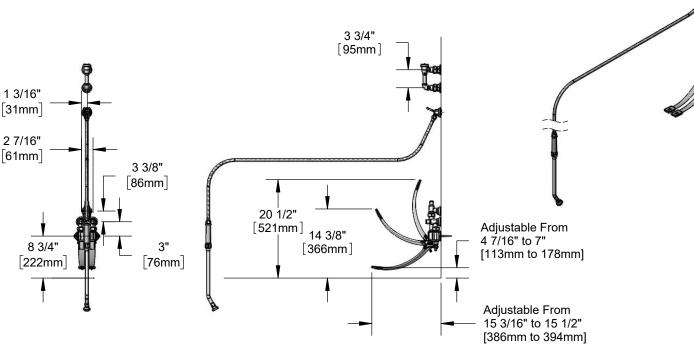

## Features & Benefits:

- Wall mount double pedal valve with polished chrome plated brass body
- Pedal valve with 1/2" NPT female angled loose key stops
- Volume control valve with 3/8" NPT female outlet on pedal valve
- Wall hook outlet with 3/8" NPT female inlet
- Elevated vacuum breaker with 3/8" female inlet and outlet
- 54" PVC hose with extended spray nozzle w/ 2.2 GPM rosesprav
- Material: Polished chrome plated brass body, loose key stops, vacuum breaker, wall hook outlet & extended nozzle, aluminum pedals and reinforced PVC hose.

## **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- ASSE 1001 (VB)

Warranty: One Year (Limited)

## Performance Data:

Pressure: 20 - 125 psi

Temperature: 40 °F - 140 °F

Flow Rate: 2.2 GPM @ 60 psi











