





#### Architect/Engineering Specifications:

Bedpan washer, 68" reinforced PVC hose, extended spray nozzle outlet with 2.2 GPM rosespray and 1/2" NPT male inlet. Certified to ASME A112.18.1/CSA B125.1

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

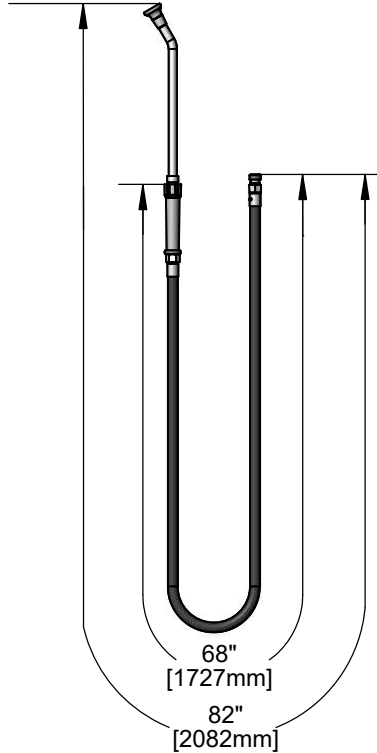

#### Features & Benefits:

- 68" reinforced PVC hose
- Extended spray nozzle outlet w/ 2.2 GPM rosespray
- 1/2" NPT male inlet
- Material: Reinforced PVC hose and chrome polished tubular spray nozzle

#### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- 2019 DOE PRSV Non-Compliant

**Warranty:** One Year (Limited)

#### Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 2.2 GPM @ 60 psi

