

Medical & Lavatory Faucets

TAG:


B-2991-WS

Easy Install

Concealed Widespread Lavatory Faucet

Architect/Engineering Specifications:

8" concealed deck mount mixing faucet with forged brass body, polished chrome plated cast spout with 1.5 GPM aerator, metering cartridges, push button caps, polished chrome plated escutcheons and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

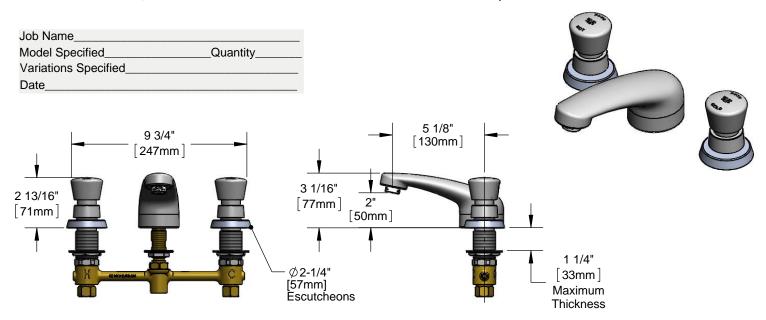

Features & Benefits:

- 8" EasyInstall concealed deck mount mixing faucet w/ forged brass body
- Polished chrome plated brass cast spout
- 1.5 GPM aerator, Series 3 (B-0199-03-WS)
- Metering cartridges
- Push button caps with vandal resistant screws
- Adjustable metering cycle, 10 to 30 seconds
- 1/2" NPSM male inlets w/ coupling nuts
- Material: Forged brass body, chrome plated metal push button caps & polished chrome plated escutcheon & cast spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F Flow Rate: 1.5 GPM @ 60 psi

Water Consumption: @ 10 sec = 0.25 gal

@ 15 sec = 0.38 gal





Optional Outlets (Series 3 / VR Series 8)

Non-Aerated GPM Aerated (Laminar) VR Aerated	VR Non-Aerated (VR Laminar)	Optional Cartridges
0.35 N/A □ B-0199-03-N035 N/A 0.5 N/A □ B-0199-03-N05 N/A 1.0 N/A N/A N/A 1.5 □ Standard N/A □ B-0199-08-WS 2.2 □ B-0199-03 □ B-0199-26 □ B-0199-08	□ B-0199-08-N035 □ B-0199-08-N05 □ B-0199-08-LF-10 S N/A □ B-0199-28	□ Push Button Metering (Standard)□ Pivot Action Metering□ Wrist Action Metering







T&S BRASS AND BRONZE WORKS, INC.

