
Single Lever Faucet

Architect/Engineering Specifications:

Deck mount single lever faucet with polished chrome plated brass body, integral 9 3/16" swivel spout, polished chrome plated deck plate, 2.2 GPM aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle, 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections, side spray with 4 ft. hose and hose guide. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

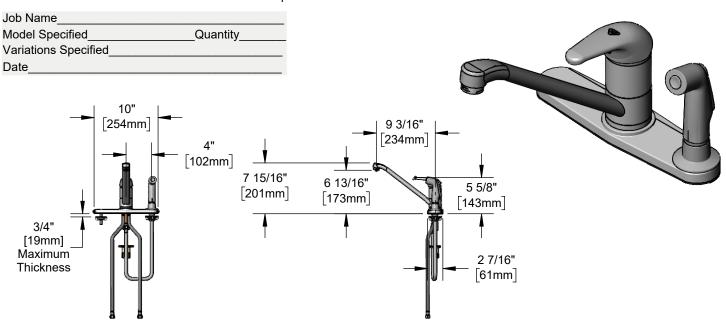


Features & Benefits:

- Deck mount single lever faucet with polished chrome plate brass body
- Polished chrome plated brass 10" deck plate (Fits 8" Hole Centers)
- 9 3/16" swivel spout
- 2.2 GPM aerator, Series 4 (B-0199-04)
- Ceramic cartridge w/ adjustable temperature limit stop
- Single lever handle w/ color coded index
- 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections
- · Side spray with 4 ft. hose and hose guide
- Material: Polished chrome plated brass body & deck plate, chrome plated thermoplastic sidespray, chrome plated metal handle and stainless steel hoses

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Warranty: One Year (Limited)

Ceramic Cartridge: Two Year (Limited)

ADA Compliant

Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar]

Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Accessories
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035	□ Cover Plate w/ Side
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05	Spray Hole (Standard)
1.0	N/A	N/A	N/A	□ B-0199-09-LF-10	□ 7ft Long Side Spray
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF-15	□ 6" Long Handle
2.2	Standard	□ B-0199-25	□ B-0199-09	□ B-0199-27	







T&S BRASS AND BRONZE WORKS, INC.



