Swivel/Rigid Sink and Pantry Faucets B-0305-CR-TL


TAG:


Single Pantry Faucet


Architect/Engineering Specifications:

Single hole single temperature tin lined deck mount faucet with polished chrome plated brass body, 5 3/4" swivel gooseneck with stream regulator outlet, ceramic cartridge with check valve, lever handle and 1/2" NPSM male inlet. Certified to ASME A112.18.1/CSA B125.1 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name Model Specified Quantity Variations Specified Date





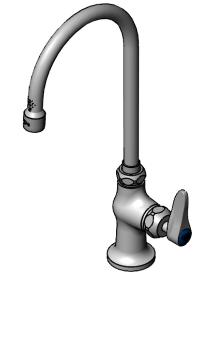

Features & Benefits:

- Single hole single temperature tin lined deck mount faucet w/ polished chrome plated brass body
- 5 3/4" swivel gooseneck w/ stream regulator outlet
- Tin-lined for deionized or reverse osmosis water
- Tin-lined Quarter-turn Cerama cartridge w/ check
- Lever handle w/ blue color coded index
- 1/2" NPSM male inlet
- Optional tailpiece and nut for 1/4" NPT male connection
- Material: Polished chrome plated brass body & tubular spout and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:



- Pressure: 20 125 psi [1.38 8.62 bar] Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate: 4.06 GPM [15.4 L/min] @ 60 psi [4.14 bar]

Optional Handles

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm







T&S BRASS AND BRONZE WORKS, INC.



