
Single Lever Faucet

Architect/Engineering Specifications:

Deck mount single lever faucet with deck plate, polished chrome plated brass body with integral spout, 4" centerline deck plate, 2.2 GPM vandal resistant aerator, ceramic cartridge with adjustable temperature limit stop, single lever handle and 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

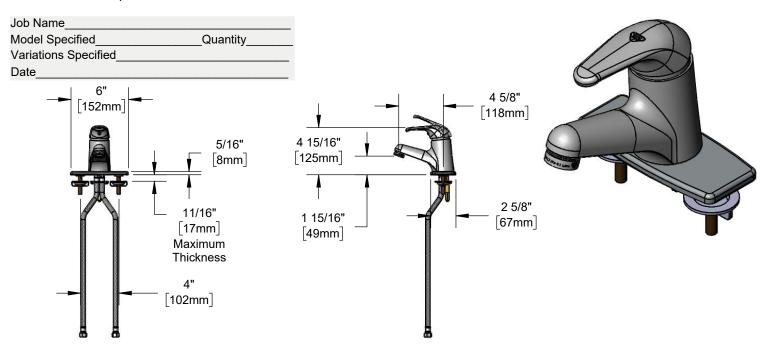


Features & Benefits:

- Deck mount single lever faucet w/ polished chrome plated brass body w/ integral spout
- 6" polished chrome plated deck plate (fits 4" hole centers)
- 2.2 GPM vandal resistant aerator, Series 9 (B-0199-09)
- Single lever handle w/ color coded index
- Ceramic cartridge w/ adjustable temperature limit stop
- 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections
- Material: Polished chrome plated brass body & deck plate, chrome plated metal handle and stainless steel hoses

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Ceramic Cartridge: Two Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 2.2 GPM @ 60 psi







Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035
0.5	N/A	□ B-0199-04-N05	N/A	□ B-0199-09-N05
1.0	N/A	N/A	N/A	□ B-0199-09-LF-10
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF-15
2.2	□ B-0199-04	□ B-0199-25	Standard	□ B-0199-27







T&S BRASS AND BRONZE WORKS, INC.

