
$T \wedge C \cdot$	
IAG.	


SAFETLINK Water Appliance Connector

Architect/Engineering Specifications:

70" coated water connector hose (blue) with 3/8" NPT male outlet and 3/8" NPT female quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9, NSF 372 and NSF 2.

Job Name______Quantity_____Variations Specified______Date_____

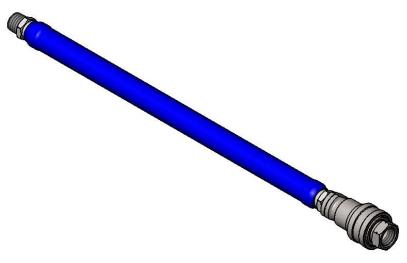







Features & Benefits:

- 72" coated water connector hose (blue)
- 3/8" NPT male welded fitting ends
- 3/8" NPT female quick disconnect
- Extruded coating
- · Stainless steel braided hose
- Material: Extruded coated stainless steel braids

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 2
- NSF 61 Section 9
- NSF 372 (Low Lead Content)

Warranty: Five Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40°F - 175°F
Flow Rate: 9.31 GPM @ 60 psi











