
Flexible Stainless Steel Hose


Architect/Engineering Specifications:

23" flexible stainless steel hose with heat resistant handle, 3/4-14 UN female outlet and 3/4-14 UN female inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name_______Quantity______Variations Specified_______Date_____



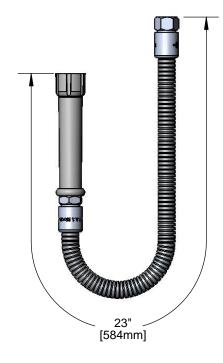

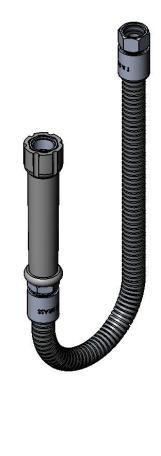

Features & Benefits:

- 23" flexible stainless steel hose with heat resistant gray handle
- · Polyurethane inner tubing
- 3/4-14 UN female outlet
- 3/4-14 UN female inlet
- · Hose washers included
- Material: Polished chrome plated brass end fittings, thermoplastic handle and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)

Warranty: Three Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 6.70 GPM @ 60 psi











T&S BRASS AND BRONZE WORKS, INC.

