



SERVING THE HEALTHCARE INDUSTRY:

A COMPLETE OFFERING
OF SPECIALIZED PRODUCTS FROM T&S



EXPERIENCE YOU CAN TRUST.

T&S has been supplying highly durable plumbing products to the healthcare industry for more than six decades. From hospital rooms and surgical suites to assisted living facilities and more, T&S' wide and deep range of specialized products helps meet the unique needs of today's healthcare facilities.



SPECIALIZED FEATURES FOR A SAFER, MORE HYGIENIC AND MORE EFFICIENT ENVIRONMENT

- **ANTIMICROBIAL COATING**
- **ENERGY- AND WATER-SAVING DESIGNS**
- **PLAIN END SPOUTS/LAMINAR FLOW OUTLETS**
- **AUTOMATIC LINE PURGE FUNCTION ON SENSOR FAUCETS**

DISCOVER T&S PRODUCTS AT WORK.

Explore the most popular specifications
and areas where you'll find T&S products in action:



Public Restrooms



Patient/Exam Rooms



Nurses Station



DeCon Soil Room



Surgeon Scrub Sink



Pharmacy



Laboratory



Procedure Labs



Kitchen





PUBLIC RESTROOM

TOP SPECIFICATIONS



B-2711-VF05

4" centerset, deck mount lavatory single lever faucet, polished chrome brass body with integral spout, 0.5 GPM vandal resistant non-aerated spray device, ceramic cartridge with adjustable temperature limit stop, single lever handle and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



EC-3142-VF05

Single hole deck mount electronic sensor faucet with polished chrome plated brass body and integral spout, 0.5 GPM vandal resistant non-aerated spray device, above deck electronic AC/DC control module with internal flow control setting switches, above deck temperature mixing handle, anti-rotation pin, 19" flexible stainless steel supply hoses and check valve adapters with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.





EC-3103-VF05-HG

4" deck mount electronic sensor faucet with polished chrome plated brass body with integral spout, 0.5 GPM vandal resistant non-aerated spray device, hydro-generator power supply, AC/DC control module with internal flow control setting switches, temperature control mixing valve with check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.



B-1141-XSCR4V05

4" deck mount mixing faucet with chrome plated brass body, 5 3/4" swivel gooseneck with 0.5 GPM vandal resistant non-aerated spray device, ceramic cartridges with check valves, 4" wrist action handles with vandal resistant screw, 1/2" NPSM extended male inlets and chrome plated escutcheon. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.





PATIENT/EXAM ROOMS

TOP SPECIFICATIONS



B-2866-05FC-CR

8" concealed deck mount mixing faucet with forged brass body, swivel gooseneck with plain end, 1.6 GPM flow control, ceramic cartridges, 4" wrist action handles, chrome plated escutcheons and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



B-0892-CR7XPF15

4" deck mount mixing faucet with polished chrome plated brass body, 5 11/16" swivel/rigid gooseneck with plain end outlet, 1.5 GPM flow control in swivel piece, ceramic cartridges with check valves, 4" wrist action handles and 1/2" NPSM male inlets with compression nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.





EC-3130-XP-F15

Single hole deck mount electronic sensor faucet with polished chrome plated brass body and 5 11/16" plain end swivel/rigid gooseneck w/ 1.5 GPM flow regulator, above deck electronic AC/DC control module with internal flow control setting switches, above deck temperature mixing handle, anti-rotation pin, 19" flexible stainless steel supply hoses and check valve adapters with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.



EC-3100-5XP15T4

Single hole deck mount electronic sensor faucet with polished chrome plated brass body, 4" c/c deck plate, 5 11/16" plain end swivel gooseneck, 1.5 GPM flow control, AC/DC control module with internal flow control setting switches, thermostatic temperature mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372, UL 1951 and ASSE 1070. Meets ADA ANSI/ICC A117.1 requirements.





B-1142-QT5XPF15

8" deck mount mixing faucet with chrome plated brass body, 5 11/16" plain end swivel gooseneck, 1.5 GPM flow regulator swivel piece, compression cartridges with spring checks, wrist action handles, 1/2" NPSM extended male inlets and chrome plated escutcheon. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



B-0676

Wall mount double pedal valve with 1/2" NPT female angled loose key stop inlets, 3/8" NPT female angled loose key stop volume control outlet, elevated atmospheric vacuum breaker with 3/8" NPT female inlet and outlet, wall hook outlet with 3/8 NPT female inlet, 68" PVC hose with heat resistant handle and extended nozzle. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF-372 and ASSE 1001.



NURSES STATION

TOP SPECIFICATIONS



B-2866-05FC-CR

8" concealed deck mount mixing faucet with forged brass body, swivel gooseneck with plain end, 1.6 GPM flow control, ceramic cartridges, 4" wrist action handles, chrome plated escutcheons and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



B-0892-122X-LAM

4" centerset deck mount mixing faucet with polish chrome plated brass body, 5 3/4" swivel/rigid gooseneck, 2.2 GPM laminar flow device, compression cartridges with spring checks, 4" wrist action handles and 1/2" NPSM male inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



EC-3130-XP-F15

Single hole deck mount electronic sensor faucet with polished chrome plated brass body and 5 11/16" plain end swivel/rigid gooseneck w/ 1.5 GPM flow regulator, above deck electronic AC/DC control module with internal flow control setting switches, above deck temperature mixing handle, anti-rotation pin, 19" flexible stainless steel supply hoses and check valve adapters with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.



EC-3100-5XP15T4

Single hole deck mount electronic sensor faucet with polished chrome plated brass body, 4" c/c deck plate, 5 11/16" plain end swivel gooseneck, 1.5 GPM flow control, AC/DC control module with internal flow control setting switches, thermostatic temperature mixing valve with integral check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372, UL 1951 and ASSE 1070. Meets ADA ANSI/ICC A117.1 requirements.





B-1142-QT5XPF15

8" deck mount mixing faucet with chrome plated brass body, 5 11/16" plain end swivel gooseneck, 1.5 GPM flow regulator swivel piece, compression cartridges with spring checks, wrist action handles, 1/2" NPSM extended male inlets and chrome plated escutcheon. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



B-2731-LF15

Deck mount single lever faucet with 10" deck plate, polished chrome plated brass body with integral 9" swivel spout, 1.5 GPM vandal resistant laminar flow device, ceramic cartridge with adjustable temperature limit stop, single lever handle and 16" flexible stainless steel supply hoses with 3/8" O.D. compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



DECON SOIL ROOM

TOP SPECIFICATIONS



B-0113-ADF12

Single hole deck mount mixing faucet with polished chrome plated brass body, add-on faucet with compression cartridge with spring check and lever handle, 12" swing nozzle with stream regulator outlet, 24" riser, 44" flexible stainless steel hose with heat resistant handle, 1.15 GPM spray valve, compression cartridges with spring checks, lever handles, 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" compression connections, spray valve holder, and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.



BL-5705-01

Single hole single temperature deck mount faucet with polished chrome plated brass body, 5 7/8" swivel/rigid gooseneck with serrated tip outlet, compression cartridge with spring check, 4-arm handle and 1/2" NPSM male inlet. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.





B-0330-04

8" wall mount mixing faucet with polished chrome plated brass body, 5 3/4" swivel/rigid gooseneck with stream regulator outlet, compression cartridges with spring checks, 4" wrist action handles and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61- Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



B-0657

8" wall mount mixing faucet with polished chrome plated brass body, polished chrome plated brass spout with vacuum breaker, pail hook and garden hose male outlet, compression cartridges with spring checks, 6" wrist action handles, 1/2" NPT female inlets, loose key stops, 1 3/4" wall extensions and lower support rod. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and ASSE 1001. Meets ADA ANSI/ICC A117.1 requirements.





B-0676

Wall mount double pedal valve with 1/2" NPT female angled loose key stop inlets, 3/8" NPT female angled loose key stop volume control outlet, elevated atmospheric vacuum breaker with 3/8" NPT female inlet and outlet, wall hook outlet with 3/8 NPT female inlet, 68" PVC hose with heat resistant handle and extended nozzle. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF-372 and ASSE 1001.



B-0678

Wall mount bed pan washer, angled loose key stop, control valve, 4-arm handle with color coded index, 3/8" atmospheric vacuum breaker, 68" PVC hose, spray valve with extended nozzle, wall hook and 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1 and ASSE 1001.



SURGEON SCRUB SINK

TOP SPECIFICATIONS



EC-3101-LF22-SB

Single hole wall mount electronic sensor faucet with polished chrome plated brass body, 7 1/16" rigid surgical gooseneck, 2.2 GPM vandal resistant laminar flow device, AC/DC control module with internal flow control setting switches, temperature control mixing valve with check valves and 18" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61- Section 9, NSF 372 and UL 1951. Meets ADA ANSI/ICC A117.1 requirements.



B-0537

Wall mount rigid dummy gooseneck with polished chrome plated brass elbow and gooseneck with 2.2 GPM aerator, 1/2" NPT female inlet and adjustable wall flange. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

B-0502

Floor mount double pedal valve with polished chrome plated solid brass body and pedals, metering cartridges, 1/2" NPT female inlets and outlet and mounting screws. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.





PHARMACY

TOP SPECIFICATIONS



B-2866-05-LF15

8" deck mount lavatory mixing faucet, swivel gooseneck w/ 1.5 GPM laminar flow device, compression cartridges, 4" wrist action handles, chrome plated escutcheons and 1/2" NPSM male inlets with coupling nuts. Certified to ASME A112.18.1/ CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ ICC A117.1 requirements.



BL-5700-04

Single hole deck mount mixing faucet with polished chrome plated brass body, polished chrome plated swivel/rigid gooseneck with 2.2 GPM aerator, compression cartridges with spring checks, 4-arm handles and 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" compression connections. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



LABORATORY

TOP SPECIFICATIONS



BL-9505-01

Single hole single temperature deck mount faucet with PVC body, 6" rigid gooseneck with serrated tip outlet, rotary handle and 3/8" NPT female inlet. Certified to ASME A112.18.1/ CSA B125.1.



BL-6005-02

Combination gas and water laboratory turret with polished chrome plated brass body, polished chrome plated rigid nozzle with vacuum breaker and serrated tip outlet, hose cocks, 4-arm handle and 3/8" NPT male gas and water inlets. ASME A112.18.1 / CSA B125.1, NSF 61 - Section 9, NSF-372 and ANSI Z21.15a / CSA 9.1a. Meets ADA ANSI/ICC A117.1 requirements.



BL-5700-08

Single hole deck mount mixing faucet with polished chrome plated brass body, polished chrome plated swivel/rigid vacuum breaker nozzle with serrated tip, compression cartridges with spring checks, 4-arm handles and 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" compression connections. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



BL-4200-0

Laboratory turret with polished chrome plated brass body, (2) serrated tip outlets at 90 degrees and 3/8" NPT female inlet. Certified to ANSI Z21.15a / CSA 9.1a. Meets ADA ANSI/ICC A117.1 requirements.





MPZ-2DWV-08-CR

Single hole deck mount mixing faucet with polished chrome plated brass body, add-on faucet with ceramic cartridge and wrist action handle, 8" swing nozzle with stream regulator outlet, 5 3/16" riser, vacuum breaker, 24" flexible stainless steel hose with heat resistant handle, 1.15 GPM spray valve, ceramic cartridges with check valves, wrist action handles, 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" compression connections, 6" adjustable wall bracket, spray valve holder and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.



BL-5850-01TL

Single hole single temperature tin-lined deck mount faucet with polished chrome plated brass body, 5 7/8" swivel/rigid gooseneck with serrated tip outlet, fast self-closing cartridge, 4-arm handle and 1/2" NPSM male inlet. Certified to ASME A112.18.1/CSA B125.1 and NSF 372.





PROCEDURE LABS

TOP SPECIFICATIONS



B-2866-05FC-CR

8" deck mount lavatory mixing faucet with forged brass body, 5 11/16" swivel/rigid gooseneck with plain end outlet, 1.5 GPM flow control device, ceramic cartridges with check valves, 4" wrist action handles, chrome plated escutcheons and 1/2" NPT male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.



B-1142-QT5XPF15


8" deck mount mixing faucet with chrome plated brass body, 5 11/16" plain end swivel gooseneck, 1.5 GPM flow regulator swivel piece, compression cartridges with spring checks, wrist action handles, 1/2" NPSM extended male inlets and chrome plated escutcheon. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.





KITCHEN

TOP SPECIFICATIONS

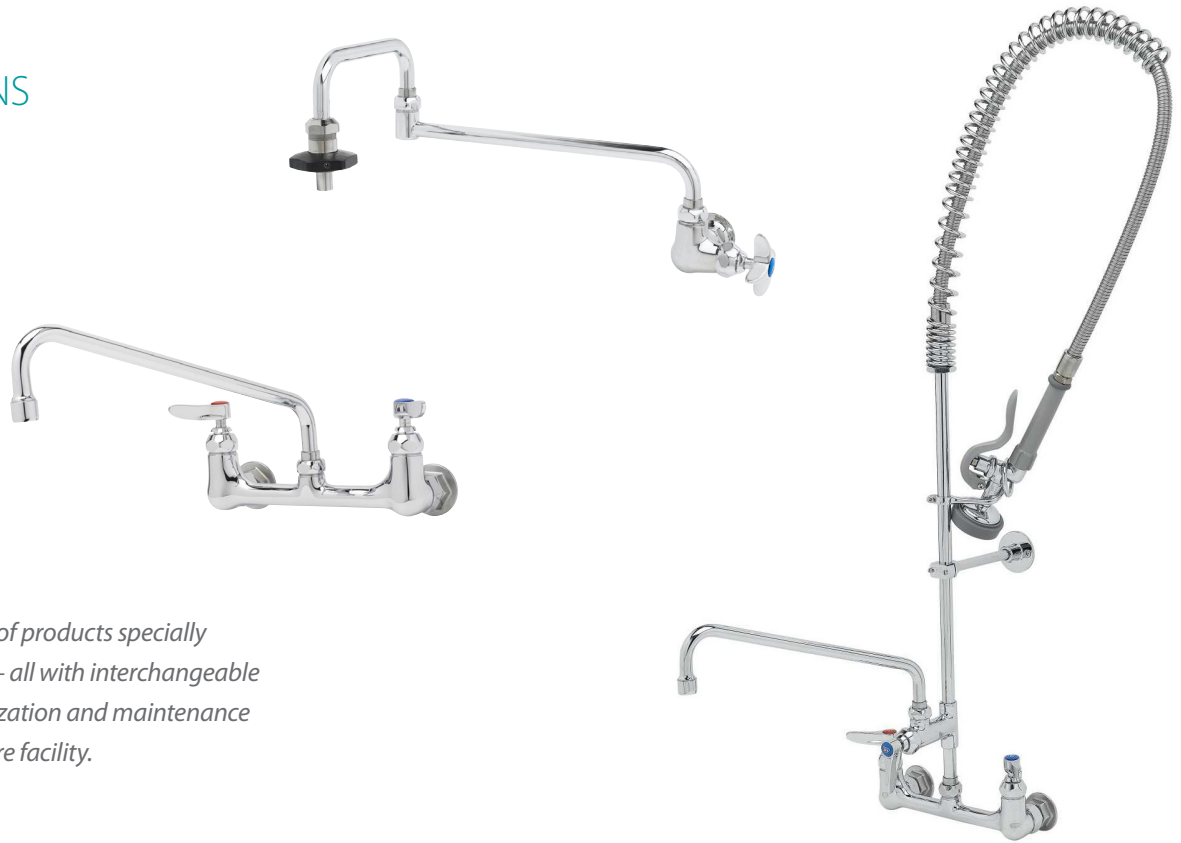

T&S offers a complete line of products specially designed for the kitchen — all with interchangeable parts that make standardization and maintenance easier throughout the entire facility.



IT'S TRUE:

more engineers than ever are specifying T&S products for the healthcare market. It's a name they trust—with a broad lineup and tools that make their job easier. With world-class support, T&S is there for every project, every time.



SEE WHAT T&S CAN DO FOR YOU.

READY TO LEARN MORE? Visit tsbrass.com/markets/healthcare for more information about our lineup of healthcare products, or contact our team today at 1-800-476-4103 with questions about unique applications and more.



RELIABILITY BUILT IN™

2 Saddleback Cove • P.O. Box 1088 • Travelers Rest, SC 29690 • (800) 476-4103 • www.tsbrass.com