



# Washdown Stations

## MV-0771-11C




TAG:

Mixing Valve

### Architect/Engineering Specifications:

1/2" chrome plated mixing valve with (2) check valves, (2) globe valves 1/2" NPT female thread inlets and 3/4" NPT female thread outlet.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

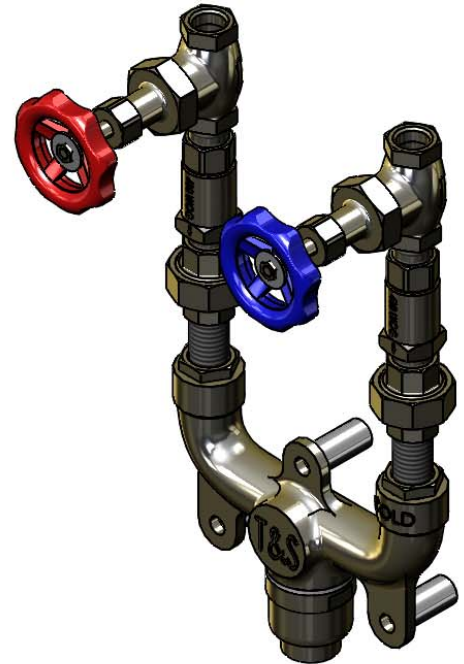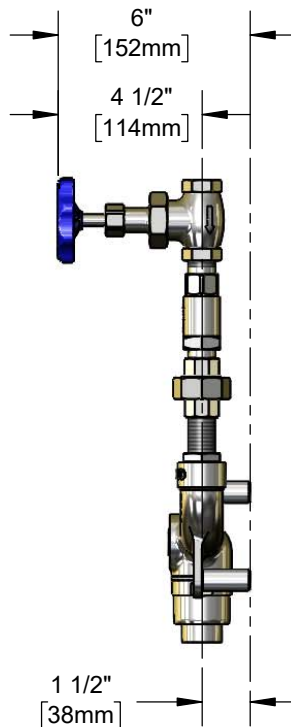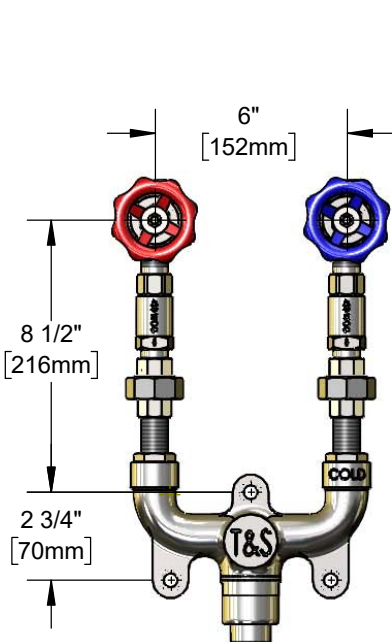

### Features & Benefits:

- 1/2" mixing valve
- (2) check valves
- (2) globe valves
- 1/2" NPT female thread inlets
- 3/4" NPT female thread outlet
- Material : Chrome plated brass mixing valve, check valves and globe valves

### Product Compliance:

- NSF 61 Exempt (Non-Potable)

**Warranty:** One Year (Limited)

### Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 29.61 GPM @ 60 psi

(Outlet Device &/or Final Configuration May Reduce Flow Rate)



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690  
 Ph 800-476-4103 • Fax 864-834-3518  
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 01/05/18