



Architect/Engineering Specifications:


B-0107 gray spray head, 1.15 GPM. Certified to ASME A112.18.1 / CSA B125.1, NSF 61 and NSF 372. 2019 DOE PRSV - Class II compliant.

Job Name \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Variations Specified \_\_\_\_\_

Date \_\_\_\_\_

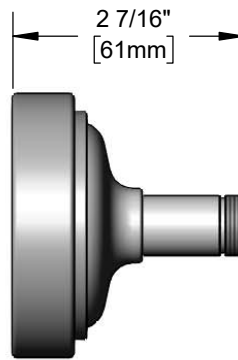

Features & Benefits:

- B-0107 gray spray head
- 1.15 GPM grey spray face and bumper guard for B-0107 spray valve
- 5/8-27 UN male thread
- Materials: Rough chrome plated brass and rubber

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV - Class II



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 60 °C]
- Flow Rate: 1.15 GPM [ 4.35 L/min] @ 60 psi [4.14 bar]

