
6" [152mm] 2 5/8" [67mm]		This Space for Architect/ Job Name Model Specified Customer/Wholesaler Contractor Architect/Engineer	DateQuantity
3 3/4" [96mm] Removable Strainer Mechanical Mixing Valve w/ Integral Check Valves	[102 Cont w/ W AC of Batto 100- 72" Pow Rub and (2) 3 18"	PSM 4" e. [102mm] 4 3/8" x 2 3/16" Deep mm x 111mm x 56mm] trol Module Box (Black) /ater Resistant Connection DC Operated w/ (4) A	A Thickness NPSM
Model Number	Product Specifications:	t D Oi l - I I - -	D = -1 - M = + - 4 !! D = -1 -
5EF-1D-DS-4DP Product Compliance:		ast Brass Single Hole [Aerator, Temperature C exible Supply Hoses &	Control Mixing Valve,
ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951	equip Foodservice Accessories	2 Saddle Travelers Phone: 800	back Cove, P.O. Box 1088 Rest, South Carolina 29690 .891.4808 Fax: 800.868.0084 equip.tsbrass.com
Drawn: MDF Checked: DMH	Approved: JHB Date:	12/29/23 Scale:	1:1 Sheet: 1 of 2

Approved:

JHB

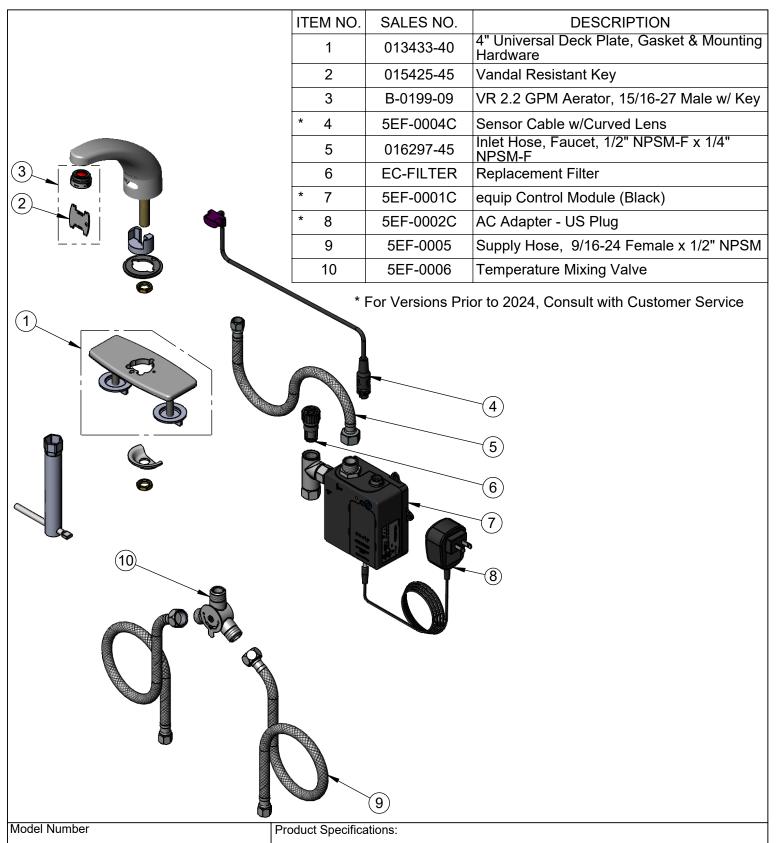

5EF-1D-DS-4DP

Product Compliance:

ASME A112.18.1 / CSA B125.1 NSF 61 - Section 9 NSF 372 (Low Lead Content) ANSI A117.1 (ADA) UL 1951 Electronic Faucet: Cast Brass Single Hole Deck Mount, 4" Deck Plate, 2.2 GPM VR Aerator, Temperature Control Mixing Valve, Check Valves, (2) 18" Flexible Supply Hoses & AC-DC Control Module



2 Saddleback Cove, P.O. Box 1088 Travelers Rest, South Carolina 29690 Phone: 800.891.4808 Fax: 800.868.0084 equip.tsbrass.com

Drawn: MDF Checked: DMH Approved: JHB Date: 12/29/23 Scale: NTS Sheet: 2 of 2