

Epoxy Coated Retractable Hose Reels


B-7232-05-ESB36

Open Epoxy Coated Hose Reel

TAG:

Architect/Engineering Specifications:

Open epoxy coated steel hose reel, front trigger gun with swivel, 3/8" x 35' heavy-duty non-marking hose, ratcheting system, multi-fit bracket, adjustable hose bumper, 3/8" NPT female inlet, 36" flexible water hose connector and universal stainless steel wall mount swing bracket with reel-to-bracket mounting hardware.

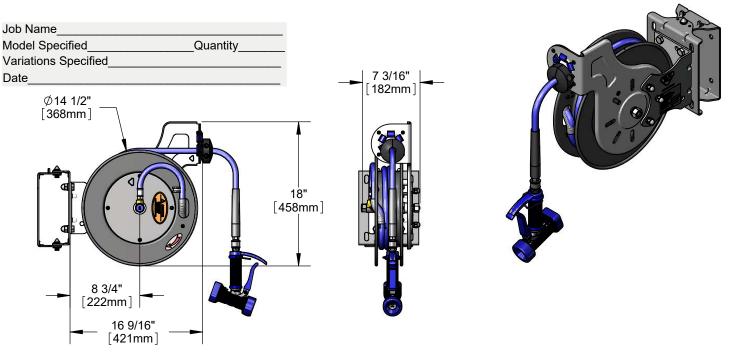

Features & Benefits:

- Open epoxy coated steel hose reel
- Stainless steel front trigger water gun and swivel with rubber cover and 5/16" orifice
- 3/8" x 35' heavy-duty non-marking hose rated to 300 PSI
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 3/8" NPT female inlet
- Adjustable hose bumper
- 36" flexible water hose connector
- Multi-fit bracket for wall, ceiling or under counter mounting
- 100 degree universal stainless steel wall mount swing bracket designed for one person installation with reel-to-bracket mounting hardware
- Material: Epoxy coated steel open reel and wall bracket, polished chrome plated spray valve, stainless steel swing bracket

Optional Hose Reel Spray Valves

□ B-0107 Med Flow Spray Valve □ B-0108 Ergonomic Medium Flow Spray Valve Ergonomic High Flow Spray Valve □ B-0108-H High Flow Spray Valve □ EB-0107 Extended Spray Wand Stainless Steel Rear Trigger Water Gun □ EB-2322

□ MV-2516-24

□ MV-2522-24 Stainless Steel Front Trigger Water Gun (Standard) □ MV-3516-24

Aluminum Rear Trigger Water Gun

Product Compliance:

- NSF 61 Exempt (Non-Potable)
- EPAct 2005 Non-Compliant (PRSV)

Warranty: Two Year (Limited) Hose: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F - 200 °F Flow Rate: 4.10 GPM @ 60 psi

Optional Hose Reel Multi-Fit Brackets

3/8" x 15', 30', & 35' Epoxy Coated Hose Reel

EasyInstall Stainless Steel Swing Bracket (Standard) □ G019430-45

□ G016652-45 **Deck Mount Pivot Bracket**

□ G018477-45 Stainless Steel Table Leg Swing Bracket







