


4" Centerset Single Lever Faucet

Architect/Engineering Specifications:

4" centerset, deck mount lavatory single lever faucet, polished chrome brass body with integral spout, vandal resistant 0.5 GPM non-aerated spray device, ceramic cartridge with adjustable temperature limit stop, single lever handle, 1/2" NPSM male inlets with coupling nuts and pop-up drain. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

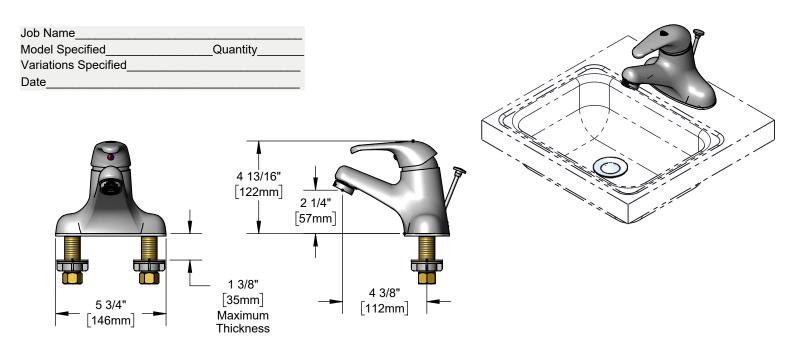

Features & Benefits:

- 4" centerset, deck mount lavatory single lever faucet
- · Polished chrome brass body with integral spout
- Vandal resistant 0.5 GPM non-aerated spray device, Series 9 (B-0199-09-N05)
- Single lever handle with color coded index
- Ceramic cartridge with adjustable temperature limit stop
- 1/2" NPSM male inlets with coupling nuts
- Pop-up drain assembly, Ø1 1/4" brass tailpiece
- Pop-up drain fits sinks with \emptyset 1 7/16" to \emptyset 1 3/4" drain hole
- Mounting hardware and deck gasket
- Material: Polished chrome brass body, chrome plated metal handle and brass drain assembly with chrome plated drain stop

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)

LOW LEAD COMPLIANT

Warranty: One Year (Limited)

Ceramic Cartridge: Two Year (Limited)

Performance Data:

Pressure: 20 - 125 psi [1.38 - 8.62 bar]

Temperature: 40°F - 140°F [4.44°C - 60°C]

Flow Rate: 0.5 GPM [1.9 L/min] @ 60 psi [4.14 bar]

Optional Outlets (Series 4 / VR Series 9)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)
0.35	N/A	□ B-0199-04-N035	N/A	□ B-0199-09-N035
0.5	N/A	□ B-0199-04-N05	N/A	Standard
1.0	N/A	N/A	N/A	□ B-0199-09-LF-10
1.5	□ B-0199-04-WS	N/A	□ B-0199-09-WS	□ B-0199-09-LF-15
2.2	□ B-0199-04	□ B-0199-25	□ B-0199-09	□ B-0199-27







T&S BRASS AND BRONZE WORKS, INC.



