




Stainless Steel Flexible Supply Hose

Architect/Engineering Specifications:

Flexible stainless steel braided connector hose with 1/2" NPSM female x M10x1 male fittings. Certified to ASME A112.18.6 / CSA B125.6, NSF 61-Section 9 and NSF 372.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

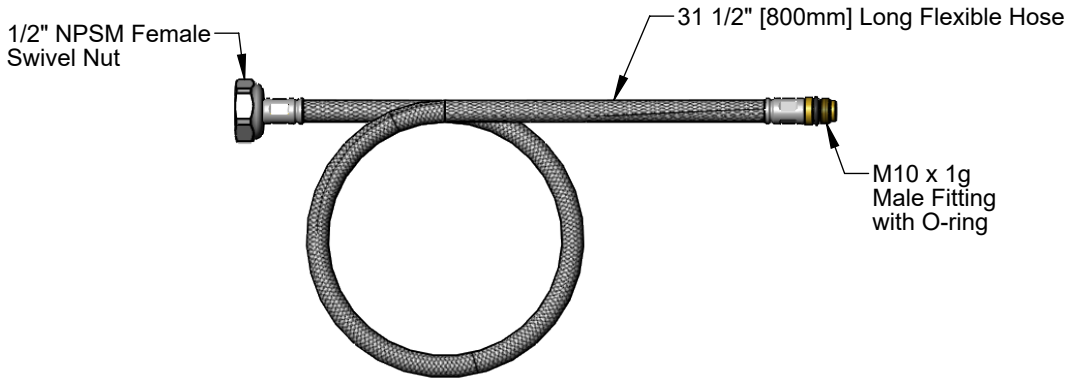

Features & Benefits:

- 31 1/2" [800mm] flexible stainless steel connector hose
- 1/2" NPSM female thread inlet
- M10x1 male outlet with o-ring
- Material: Stainless steel outer braid, brass fittings

Product Compliance:

- ASME A112.18.6 / CSA B125.6
- NSF 61 - Section 9
- NSF 372



Warranty: One Year (Limited)

Performance Data:

- Max. Operating Temp: 158°F [70°C]
- Max. Temp: 194°F [90°C]
- Max. Working Pressure: 145 psi [10 bar]
- Burst Pressure: >2176 psi [>150 bar]
- Tensile Strength: >314 Lb [>1400 N]
- Flow Rate @ 43 psi [3 bar]: 7.4 GPM [28 L/min]

