



Add-On Faucets

U12-KIT




TAG:

10" ULTRARINSE Multiple Tip Spray Arm

Architect/Engineering Specifications:

1.5 GPM 10" multiple tip spray arm, 180° diverter, spray/fill handle. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

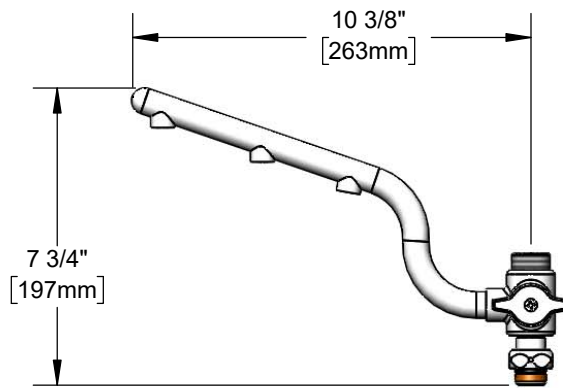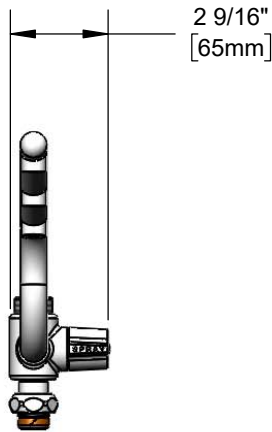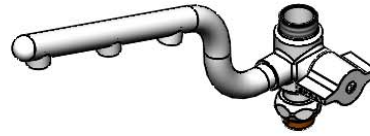

Features & Benefits:

- 1.5 GPM 10" ULTRARINSE multiple tip spray arm
- 180° cartridge switches between spray arm and swing nozzle
- For use with any swivel T&S outlet faucet or swing nozzle (18" swivel nozzle preferred)
- Material: Chrome Plated Brass

Product Compliance:

- ASME A112.181 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



ADA Compliant

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate:
 Spray Arm: 1.5 GPM [5.68 L/min] @ 60 psi [4.14 bar]



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 10/08/21