
|--|

Pet Grooming Unit

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, 18" riser, 44" flexible stainless steel hose with heat resistant handle, high flow spray valve, compression cartridges with spring checks, lever handles, 1/2" NPT female inlets, spray valve holder, 6" wall bracket and overhead spring. Certified to ASME A112.18.1/CSA B125.1.

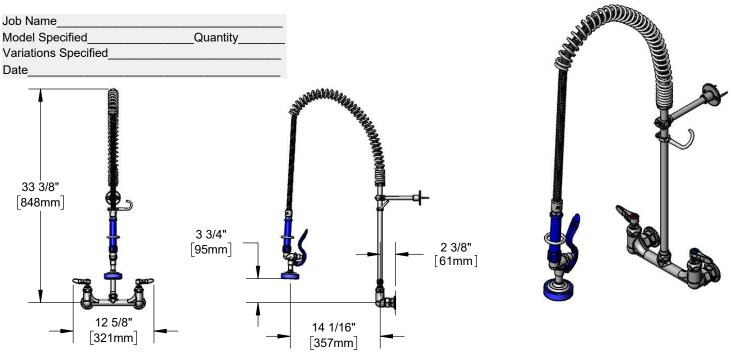

Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- EasyInstall 18" riser for quick installation
- 44" flexible stainless steel hose w/ heat resistant blue handle and hold down ring
- High flow spray valve
- Quarter-turn Eterna compression cartridges with spring checks to prevent water cross flow
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- 6" wall bracket
- Material: Polished chrome plated brass body, riser & spray valve body, stainless steel hose, and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- 2019 DOE PRSV Non-Compliant

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
Temperature: 40 °F - 140 °F
Flow Rate: 4.26 GPM @ 60 psi

Optional Handles

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)

Optional Pre-Rinse Spray Valves

- □ B-0107 (1.15 GPM)
- □ B-0107-C (0.65 GPM)
- □ B-0107-J (1.07 GPM)
- □ B-0108 (1.07 GPM)
- □ B-0108-Č (0.65 GPM)







