

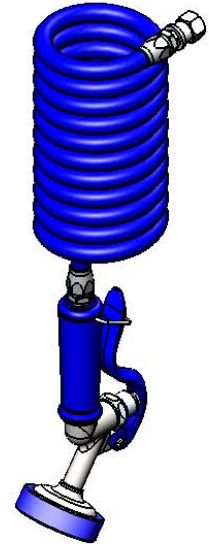


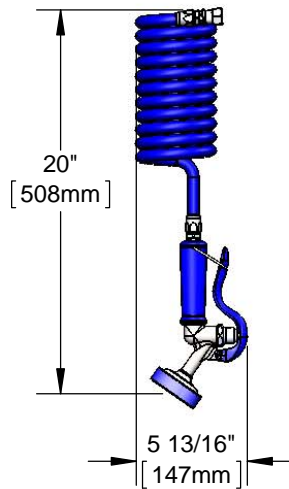

Architect/Engineering Specifications:

Aluminum 35° angle spray valve with 9' coiled polyurethane hose, heat resistant rubber grip handle, hold down clip and 3/4" NPT female outlet adapter with 360° swivel nut connection.

Job Name _____
Model Specified _____ Quantity _____
Variations Specified _____
Date _____

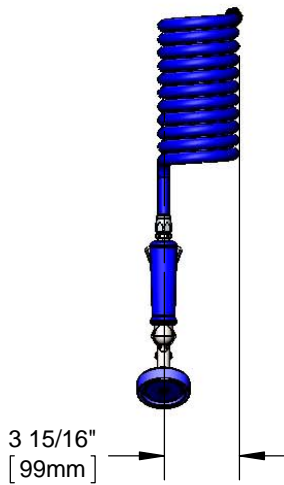

Features & Benefits:

- 35° angle spray valve
- 9' coiled polyurethane hose
- Heat resistant rubber grip handle
- Hold down clip
- 3/8" NPT female outlet
- Material: Aluminum body and polyurethane hose

Product Compliance:

- NSF 61 Exempt (Non-Potable)

Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 5.05 GPM @ 60 psi

