

Swivel/Rigid Sink and Pantry Faucets BP-0300-CR-XP15

Double Pantry Faucet

Architect/Engineering Specifications:

Single hole deck mount mixing faucet with polished chrome plated brass body, 5 11/16" swivel/rigid gooseneck with plain end outlet and 1.5 GPM flow control device, ceramic cartridges with check valves, lever handles with vandal resistant screws and 19" flexible stainless steel supply hoses with 3/8" compression connections. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

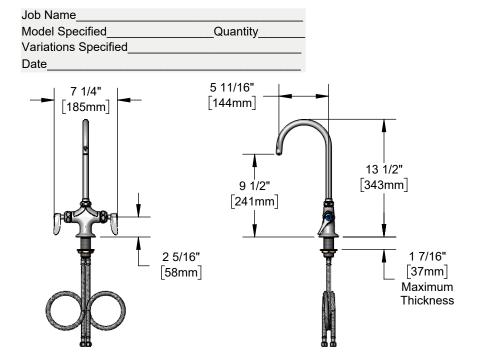



Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- 5 11/16" swivel/rigid gooseneck w/ plain end outlet
- Lock washer provided for rigid application
- 1.5 gpm flow control device (pre-installed in gooseneck swivel)
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- · Lever handles w/ color coded indexes
- Vandal resistant screws
- 19" flexible stainless steel supply hoses w/ 3/8" compression connections
- 1 7/16" maximum countertop thickness
- Material: Polished chrome plated brass body & tubular spout and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)
- · EPA WaterSense

Warranty: One Year (Limited)

· Cerama Cartridge: Lifetime (Limited)

Performance Data:

Pressure: 20 - 125 psi [1.38 - 8.62 bar]

Temperature: 40°F - 180°F [4.44°C - 82.22°C]

Flow Rate: 1.5 GPM [5.68 L/min] @ 60 psi [4.14 bar]

Optional Flow Disc

□ FD22

GPM	Model No	Optional Cartridges With Checks
0.5	□ FD05	□ Quarter-Turn Cerama w/ Check Valve (Standard)
1.0	□ FD10	□ Quarter-Turn Eterna w/ Spring Check
1.2	□ FD12	
1.5	Standard	

Optional Handles

- □ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm



2.2





T&S BRASS AND BRONZE WORKS, INC.



