
Workboard Mixing Faucet

Architect/Engineering Specifications:

8" deck mount mixing faucet with chrome plated brass body, 5 3/4" swivel gooseneck with 2.2 GPM aerator, compression cartridges with spring checks, lever handles, 1/2" NPT male inlets, polished chrome plated escutcheon, sidespray with 7 ft. vinyl hose and hose guide. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

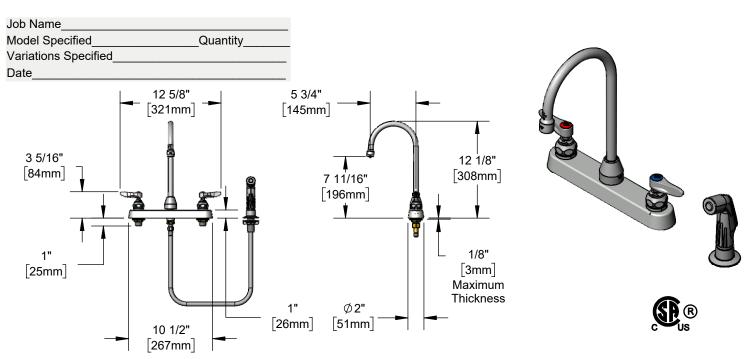

Features & Benefits:

- 8" deck mount mixing faucet w/ chrome plated brass body
- 5 3/4" swivel gooseneck
- 2.2 GPM aerator, Series 2 (B-0199-02)
- Quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- · Lever handles w/ color coded indexes
- 1/2" NPT male inlets
- · Tailpieces and nuts for 1/4" NPT male connections
- · Polished chrome plated escutcheon
- · Sidespray with 7 ft. vinyl hose and hose guide
- Material: Chrome plated brass body, tubular spout, chrome plated thermoplastic sidespray body, vinyl hose and chrome plated metal handles & escutcheon

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

LOW LEAD COMPLIANT



Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate:

Nozzle: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar] Sidespray: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar]

Optional Outlets (Series 2 / VR Series 7)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Handles
0.35	N/A	□ B-0199-02-N035	N/A	□ B-0199-07-N035	☐ 4" Wrist Action
0.5	N/A	□ B-0199-02-N05	N/A	□ B-0199-07-N05	□ Lever (Standard)
1.0	□ B-0199-02-F10	N/A	□ B-0199-07-F10	N/A	Optional Cartridges With Checks
1.5	□ B-0199-02-WS	N/A	□ B-0199-07-WS	N/A	•
2.2	Standard	N/A	□ B-0199-07	N/A	□ Quarter-Turn Cerama w/ Check Valve
					□ Quarter-Turn Eterna w/ Spring Check (Standard)







T&S BRASS AND BRONZE WORKS, INC.

