
Portable Handwashing Station

Architect/Engineering Specifications:

Portable stainless steel handwashing station with deck mount faucet with polished chrome plated brass body, 5 7/16" swivel/rigid gooseneck with 0.5 GPM vandal resistant non-aerated spray device, compression cartridge with spring check, 4" wrist action handle and 1/2" NPSM male inlet. Certified to ASME A112.18.1/CSA B125.1 and NSF 372.

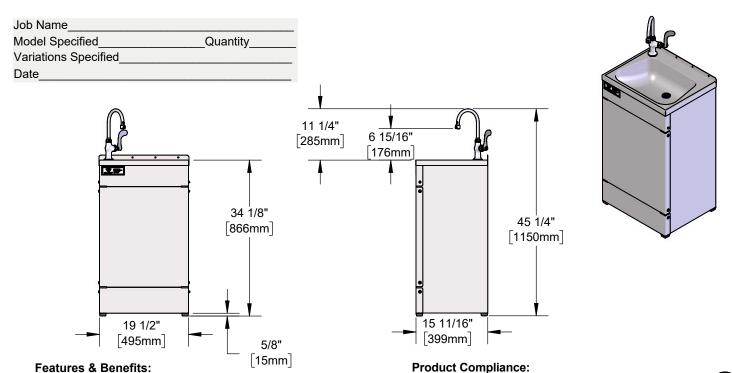

- Portable handwashing station
- Single hole single temperature deck mount faucet w/ polished chrome plated brass body
- 5 7/16" rigid/swivel gooseneck
- Lock washer provided for rigid application
- 0.5 GPM VR non-aerated spray device, Series 6 (B-0199-06-N05)
- 4" wrist action handle w/ blue color coded index
- 1/2" NPSM male inlet w/ Ø2" flange
- 3/4" hose connections for fresh water & waste
- Material: 22-gauge stainless steel handwashing station, polished chrome plated brass flange & tubular spout

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 372 (Low Lead Content)
- NSF 61 Exempt (Non-Potable)

Warranty: One Year (Limited)





Performance Data:

Flow Rate: 0.5 GPM [1.89 l/min] @ 60 psi [4.14 bar]

Optional Accessories

- □ Swivel Casters
- ☐ Backsplash w/ Soap and Paper Towel Holder
- ☐ 5 Gallon Waste Tank







