


# Aluminum Spray Unit

### **Architect/Engineering Specifications:**

Single hole single temperature wall mount faucet, compression cartridge with spring check, 4-arm handle, vacuum breaker, 9 ft coiled hose with angled aluminum spray valve and 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1 and ASSE 1001.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	

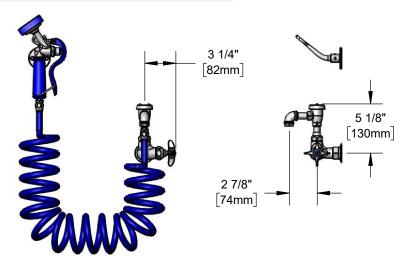



#### Features & Benefits:

- Single hole single temperature wall faucet w/ polished chrome plated brass body
- Atmospheric vacuum breaker
- 9 ft coiled hose w/ angled aluminum spray valve
- Quarter-turn Eterna compression cartridge w/ spring check
- 4-arm handle w/ color coded index
- 1/2" NPT female Inlet
- Materials: Chrome plated brass body, chrome plated metal handle, polyurethane hose and aluminum spray valve

### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- ASSE 1001 (VB)

Warranty: One Year (Limited)

#### **Performance Data:**

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F Flow Rate: 2.47 GPM @ 60 psi





# **Optional Handles**

- □ 4" Wrist Action
- □ Lever
- □ 4-Arm (Standard)

## **Optional Cartridges With Checks**

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)









