


# **Medical and Lavatory Faucets**

B-2866-05FC-CR

**Easylinstall** Concealed Widespread Lavatory Faucet

## **Architect/Engineering Specifications:**

8" deck mount lavatory mixing faucet with forged brass body, 5 11/16" swivel/rigid gooseneck with plain end outlet, 1.5 GPM flow control device, ceramic cartridges with check valves, 4" wrist action handles, chrome plated escutcheons and 1/2" NPT male inlets with coupling nuts. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

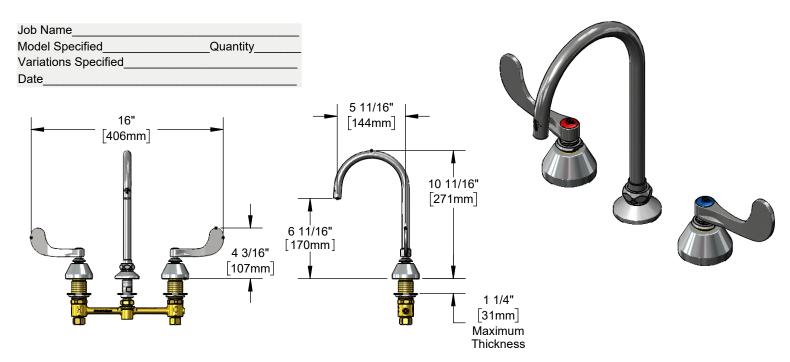


### Features & Benefits:

- 8" EasyInstall concealed deck mount faucet w/ forged brass body
- 5 11/16" swivel/rigid gooseneck
- Lock washer provided for rigid application
- 1.5 GPM flow control device (pre-installed in gooseneck swivel)
- Quarter-Turn Cerama cartridges w/ check valves to prevent cross flow of water
- 4" wrist action handles w/ color coded indexes
- 1/2" NPT male inlets w/ coupling nuts
- Material: Forged brass body, chrome plated metal handles & escutcheons and polished chrome plated brass tubular spout

# **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)



Cerama Cartridge: Lifetime (Limited)

#### Performance Data:

ADA Compliant

- Pressure: 20 125 psi [1.38 8.62 bar]
  Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate: 1.5 GPM [5.68 L/min] @ 60 psi [4.14 bar]

## **Optional Flow Disc**

GPM	Model No	Optional Cartridges	Optional Handles
0.5	□ FD05	□ Quarter-Turn Cerama w/ Check Valve (Standard)	☐ 4" Wrist Action (Standard)
1.0	□ FD10	□ Quarter-Turn Eterna w/ Spring Check	□ Lever
1.2	□ FD12	□ Push Button Metering	□ 4-Arm
1.5	Standard	□ Pivot Action Metering	
2.2	□ FD22	□ Wrist Action Metering	









