Medical Bedpan Washers


B-0680-ST

TAG:

Bedpan Washer

Architect/Engineering Specifications:

8" concealed bypass mixing valve with brass body and polished chrome plated adjustable wall flanges and sleeves, 1/2" NPT female outlet, compression cartridges with spring checks, 4-arm handles, 1/2" NPT female loose key straight stop inlets with tee handles, atmospheric vacuum breaker, polished chrome plated brass wall outlet, 68" PVC reinforced hose with spray valve and extended spray nozzle with 2.2 GPM rosespray. Certified to ASME A112.18.1/CSA B125.1, NSF 372 and ASSE 1001.

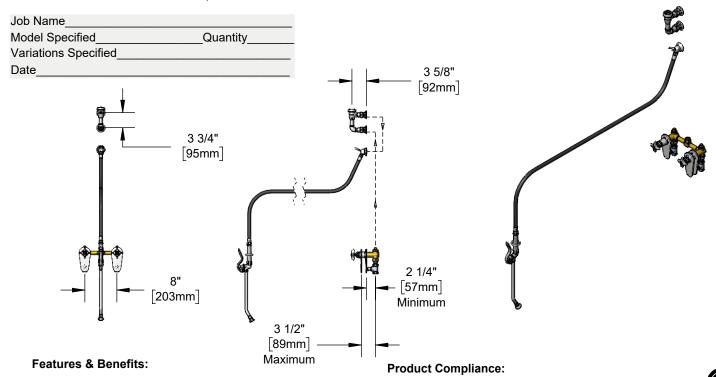

- 8" concealed bypass mixing valve with 1/2" NPT female
- 6" tall polished chrome plated brass adjustable wall flanges and sleeves
- 1/2" NPT female outlet
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- 4-arm handles and color coded indexes

union inlet connections

- 1/2" NPT female loose key straight stop inlets with tee
- Elevated 1/2" NPT atmospheric vacuum breaker assembly
- 68" reinforced PVC hose with spray valve and extended spray nozzle w/ 2.2 GPM rosespray
- Wall hook
- Material: Brass body, polished chrome plated spray valve body, vacuum breaker & adjustable flanges and polished chrome plated metal handles

- ASME A112.18.1 / CSA B125.1 NSF 61 Exempt (Non-Potable)
- NSF 372 (Low Lead Content)
- ASSE 1001 (VB)
- 2019 DOE PRSV Non-Compliant

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi [1.38 - 8.62 bar]

Temperature: 40°F - 140°F [4.44°C - 60°C]

Flow Rate: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar]

Optional Handles

Optional Cartridges With Checks

□ 4" Wrist Action

□ Lever


- □ Quarter-Turn Cerama w/ Check Valve
- □ 4-Arm (Standard)
- □ Quarter-Turn Eterna w/ Spring Check (Standard)











Date: 02/12/24

