
TAG:

Heavy Duty Hose Reel

Architect/Engineering Specifications:

Open epoxy coated heavy duty hose reel, rear trigger water gun, 3/4" x 50' industrial grade white hose, ratcheting system, adjustable hose bumper and 3/4" NPT female inlet.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	

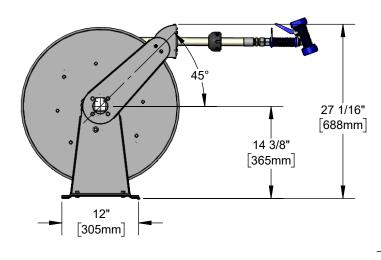

5 5/8" [143mm] 10 5/16" 262mm

Features & Benefits:

- Open epoxy coated heavy duty hose reel
- Stainless steel rear trigger water gun with rubber cover and 9/16" orifice
- 3/4" x 50' industrial grade white hose rated to 300 PSI
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 3/4" NPT female inlet
- Adjustable hose bumper
- Material: Epoxy coated steel open reel & wall bracket and stainless steel water gun

Product Compliance:

- NSF 61 Exempt (Non-Potable)
- 2019 DOE PRSV Non-Compliant

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi [1.38 - 8.62 bar]

Temperature: 40°F - 200°F [4.44°C - 93.33°C]

Flow Rate: 11.00 GPM [41.64 L/min] @ 60 psi [4.14 bar]

Optional Hose Reel Spray Valves

□ B-0107 Spray Valve

Ergonomic Medium Flow Spray Valve □ B-0108 □ B-0108-H Ergonomic High Flow Spray Valve

□ EB-0107 □ EB-2322

High Flow Spray Valve
Extended Spray Wand
Stainless Steel Rear Trigger Water Gun
Stainless Steel Front Trigger Water Gun □ MV-2516-24 □ MV-2522-24

□ MV-3516-24 Aluminum Rear Trigger Water Gun

T&S BRASS AND BRONZE WORKS, INC.





