



#### Architect/Engineering Specifications:




Single hole, single temperature large flow deck mount faucet with polished chrome plated brass body, large flow add-on faucet, compression cartridges, 4-arm handles, 12" large flow swing nozzle with plain end outlet, 60" flexible stainless steel hose with heat resistant handle, high flow angled spray valve, 1/2" NPT male inlet and swivel adapter arm. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name \_\_\_\_\_

Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_

Variations Specified \_\_\_\_\_

Date \_\_\_\_\_

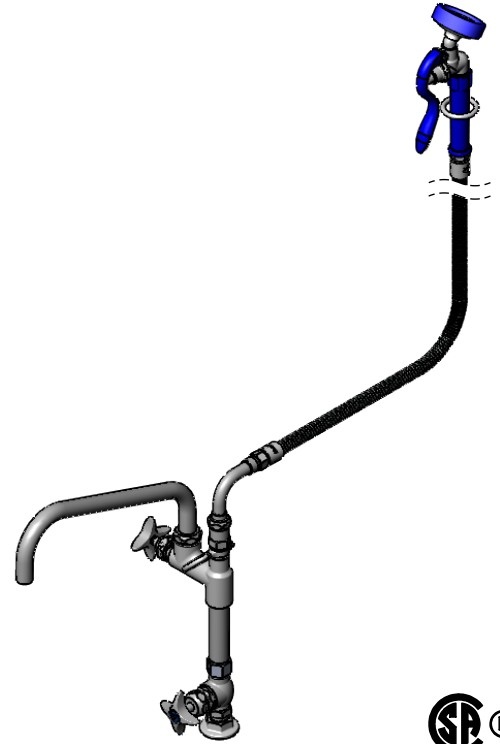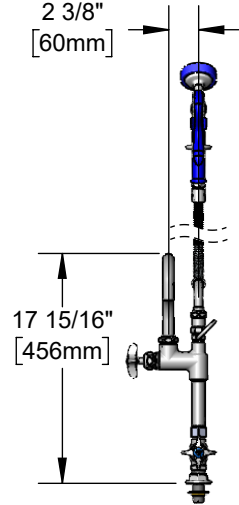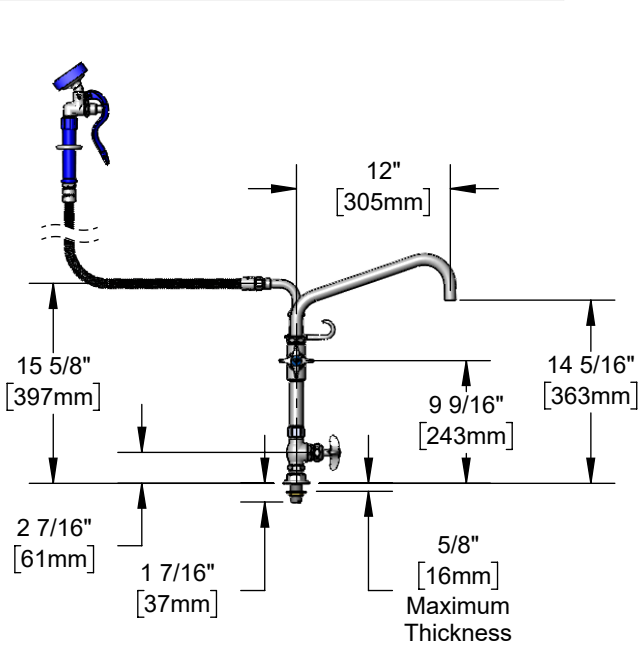

#### Features & Benefits:

- Single hole, single temperature Big-Flo deck mount faucet w/ polished chrome plated brass body
- Rigid add-on faucet w/ polished chrome plated brass body and 4-arm handle
- 12" Big-Flo plain end swing nozzle
- 60" flexible stainless steel hose w/ heat resistant blue handle and hold down ring
- High flow angled spray valve
- Big-Flo compression spindles
- 4-arm handles w/ color coded indexes
- 1/2" NPT male inlet
- 90° swivel adapter arm
- Material: Polished chrome plated brass body, tubular spout, swivel adapter arm & spray valve body, stainless steel hose and chrome plated metal handles

#### Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Non-Compliant

#### Warranty: One Year (Limited)

#### Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 60 °C]
- Flow Rate:
  - Spray Valve: 3.94 GPM [14.9 L/min] @ 60 psi [4.14 bar]
  - Add-On Faucet: 8.87 GPM [33.6 L/min] @ 60 psi [4.14 bar]

