



Water Appliance Connectors

HW-6C-48



TAG:

SAFETYLINK Water Appliance Connector

Architect/Engineering Specifications:

48" coated water connector hose (blue) with 1/2" NPT male outlet and 1/2" NPT female reverse quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9, NSF 372 and NSF 2.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

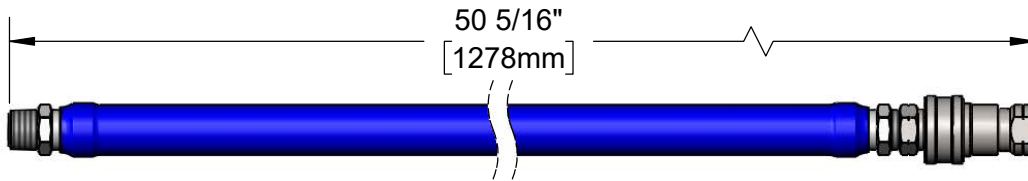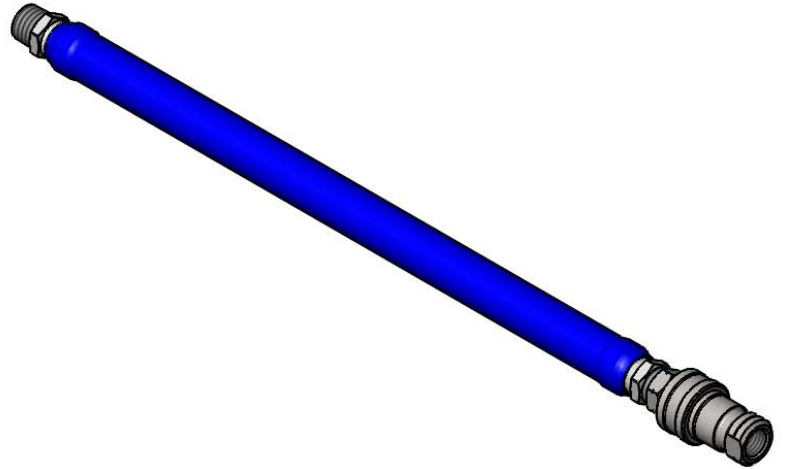

Features & Benefits:

- 48" coated water connector hose (blue)
- 1/2" NPT male welded fitting ends
- 1/2" NPT female reverse quick disconnect
- Extruded coating
- Stainless steel braided hose
- Material: Extruded coated stainless steel braids

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- NSF 2

Warranty: Five Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 175 °F
- Flow Rate: 19.16 GPM @ 60 psi



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 09/17/19