




Architect/Engineering Specifications:

Single hole single temperature deck mount faucet with PVC body, 6 3/16" rigid gooseneck with serrated tip outlet, knob handle and 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

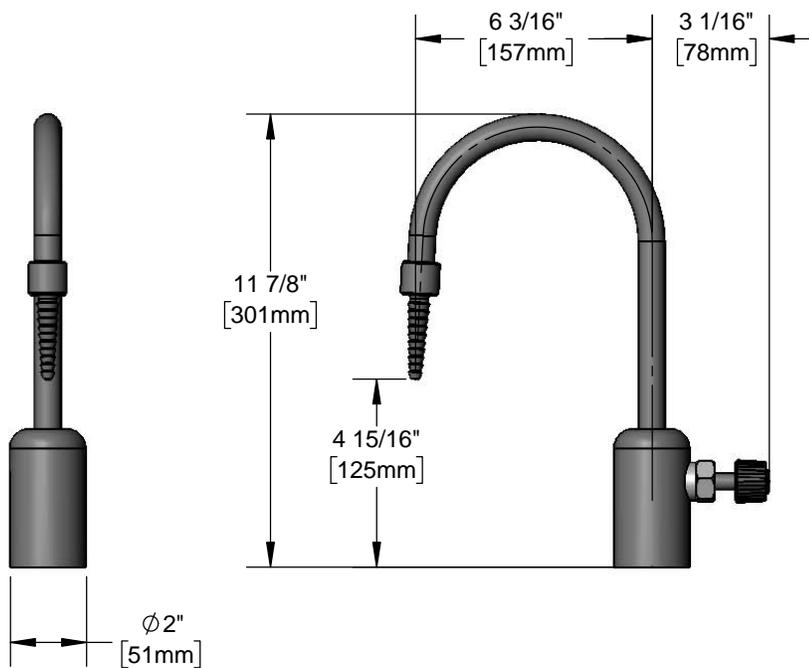

Features & Benefits:

- Single hole single temperature deck mount faucet w/ PVC body
- 6 3/16" rigid gooseneck
- Serrated tip outlet
- Knob handle with white distilled water index
- 1/2" NPT female inlet
- Material: PVC body & tubular spout and plastic handle

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 3.93 GPM @ 60 psi

