



Replacement Hoses

B-0048-HF


TAG:

Flexible Stainless Steel Hose

Architect/Engineering Specifications:

48" flexible stainless steel hose with heat resistant handle, 3/4-14 UN female outlet and 1/4" NPT male inlet. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name	_____
Model Specified	_____ Quantity _____
Variations Specified	_____
Date	_____

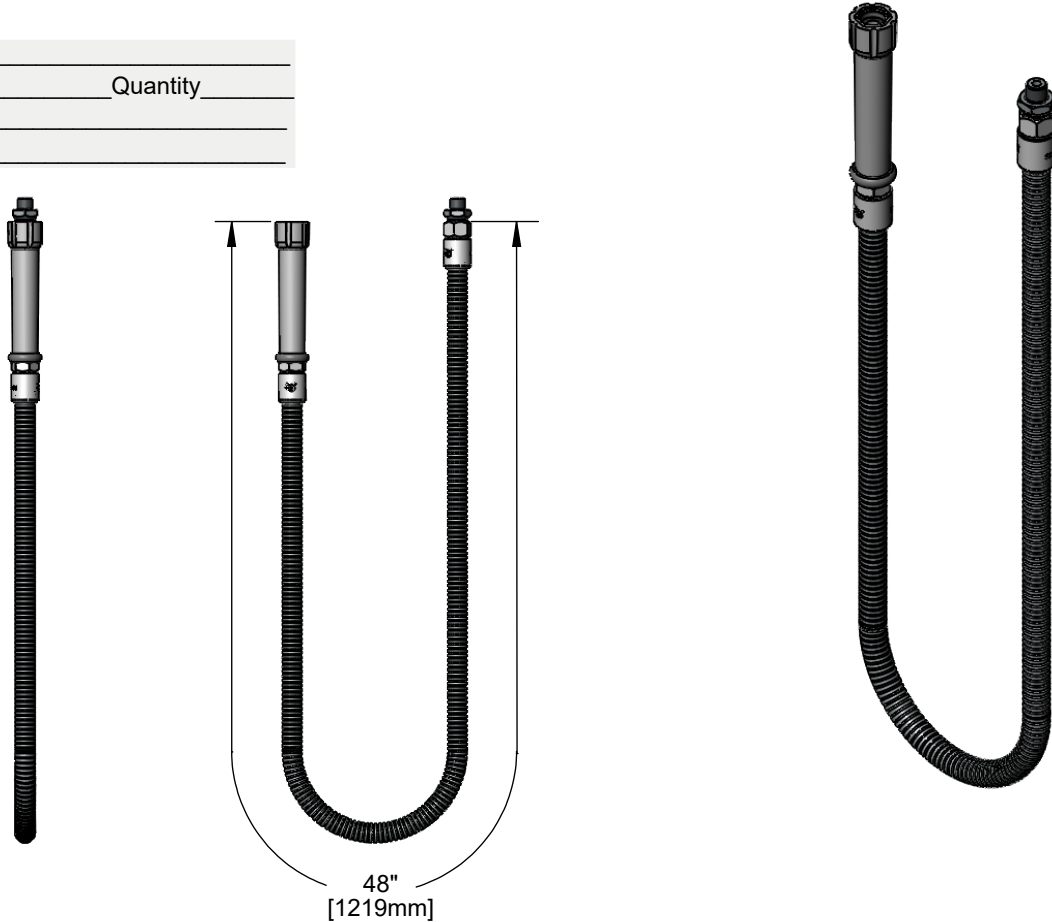

Features & Benefits:

- 48" flexible stainless steel hose with heat resistant gray handle
- Polyurethane inner tubing
- 3/4-14 UN female outlet
- 1/4" NPT male inlet designed to fit Fisher pre-rinse units
- Hose washers included
- Material: Polished chrome plated brass end fittings, thermoplastic handle and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: Three Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40°F - 140°F [4.44°C - 60°C]
- Flow Rate: 6.42 GPM [24.30 L/min] @ 60 psi [4.14 bar]



T&S BRASS AND BRONZE WORKS, INC.



• 2 Saddleback Cove • Travelers Rest, SC 29690
 Ph 800-476-4103 • Fax 864-834-3518
 • Simi Valley, CA • Ph 800-423-0150 • www.tsbrass.com

Date: 05/26/23