




# Aluminum Spray Unit

## **Architect/Engineering Specifications:**

8" wall mount mixing faucet with polished chrome plated brass body, compression cartridges with spring checks, lever handles, 90 ° swivel arm, vacuum breaker, 7' vinyl hose with angled aluminum spray valve, hanger hook, and 1/2" NPT female inlets 1/2" NPT short elbows. Certified to ASME A112.18.1/CSA B125.1 and CSA B64.8.

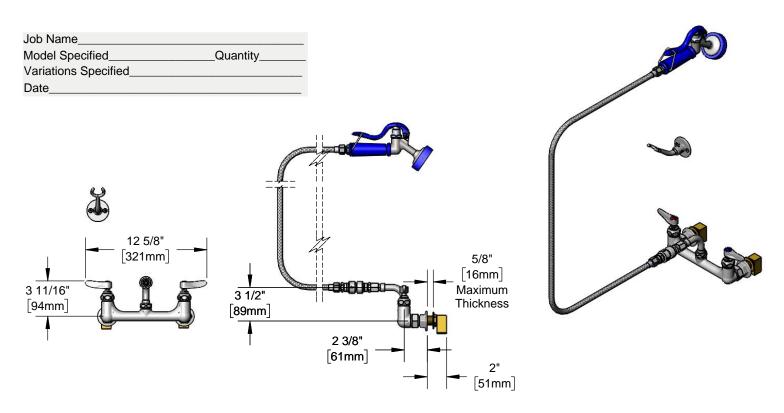

### Features & Benefits:

- 8" wall mount mixing faucet with polished chrome plated brass body
- Quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- Lever handles with color coded indexes
- 90° swivel adapter
- Vacuum breaker
- 7 ft vinyl hose
- Angled aluminum spray valve
- 1/2" NPT female eccentric inlets with Ø2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- 1/2" NPT female short elbow installation kit
- Material: Polished chrome plated brass body and tubular adapter. vinyl hose, aluminum spray valve body, and chrome plated metal handles

### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- CSA B64.8 (VB)

Warranty: One Year (Limited)

#### **Performance Data:**

Pressure: 20 - 125 psi

Temperature: 40°F - 140°F

Flow Rate: 4.12 GPM @ 60 psi

#### **Optional Cartridges With Checks Optional Handles**

□ 4" Wrist Action

□ Quarter-Turn Cerama w/ Check Valve

□ Lever (Standard)

□ Quarter-Turn Eterna w/ Spring Check (Standard)







