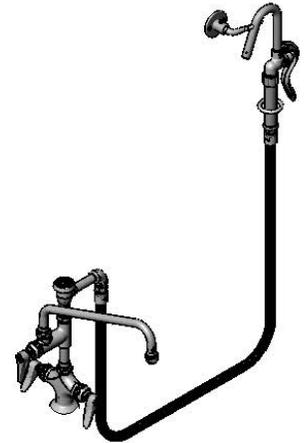
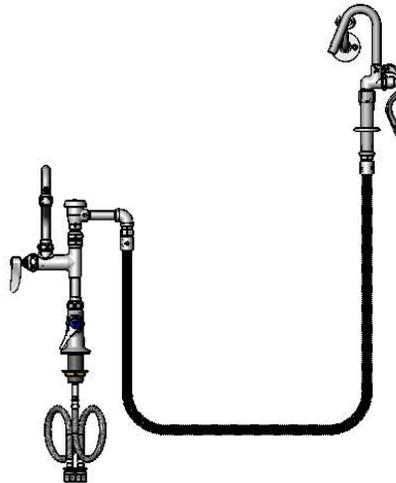
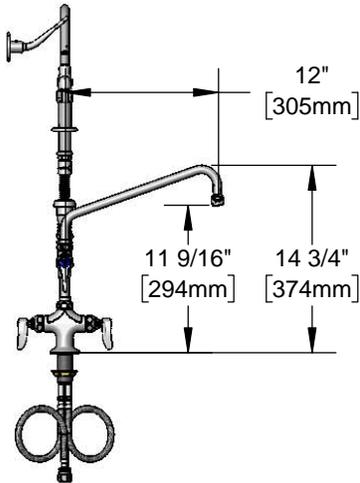


**Architect/Engineering Specifications:**

Single hole deck mount mixing faucet with polished chrome plated brass body, add-on faucet with compression cartridge with check and lever handle, 12" swing nozzle with stream regulator outlet, 3/8" NPT swivel vacuum breaker above add-on faucet, 60" flexible stainless steel hose, spray valve with hook nozzle, compression cartridges with spring checks, lever handles, 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" O.D. compression connection, (2) 36" flexible stainless steel supply hoses, (2) 1/2" NPT female inlet supply stops and wall hook. Certified to ASME A112.18.1/CSA B125.1, NSF 61, Section 9, NSF 372 and ASSE 1001

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

**Features & Benefits:**

- Single deck mount w/ polished chrome plated brass body
- EasyInstall add-on faucet for quick installation w/ polished chrome plated brass body
- 3/8" NPT vacuum breaker
- 60" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- Spray valve with hook nozzle
- 12" swing nozzle
- Quarter-turn Eterna compression cartridge w/ spring checks to prevent cross flow of water
- Lever handles with color coded indexes
- 18" flexibles stainless steel supply hoses with 1/2" NPSM / 5/8" O.D. compression connection
- (2) 36" flexible stainless steel supply hoses w/ 1/2" NPT x 1/2" NPSM female connectors
- (2) 1/2" NPT female inlet supply stops
- Material: Polished chrome plated brass, chrome plated metal handles and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- ASSE 1001 (VB)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate:
 - Spray Valve: 4.80 GPM @ 60 psi
 - Add-On Faucet: 5.57 GPM @ 60psi

**Optional Handles**

- 4" Wrist Action
- Lever (Standard)
- 4-Arm

Optional Cartridges With Checks

- Quarter-Turn Cerama w/ Check Valve
- Quarter-Turn Eterna w/ Spring Check (Standard)

