Epoxy Coated Retractable Hose Reels

TAG:




5HR-242-A

Open Epoxy Coated Steel Hose Reel

Architect/Engineering Specifications:

Open epoxy coated steel hose reel, 3/8" x 50' hose, ratcheting system, multi-fit bracket, adjustable hose bumper, reducing adapter and 3/8" NPT female inlet and 3/8" NPT male outlet.

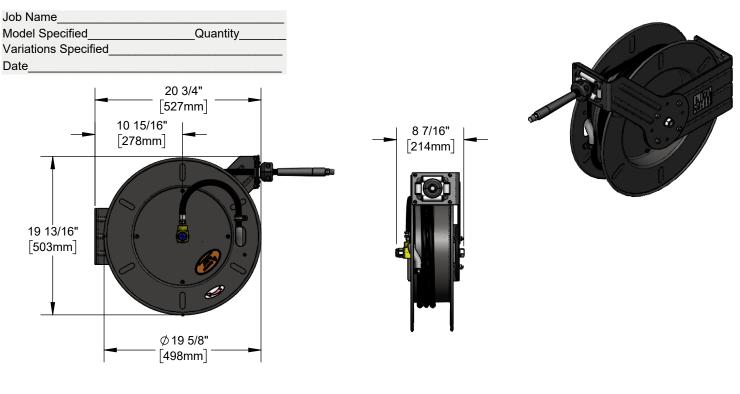

Features & Benefits:

- Open epoxy coated hose reel
- 3/8" x 50' hose
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 3/8" NPT male x 1/2" NPT reducing adapter
- 3/8" NPT female inlet
- 3/8" NPT male outlet
- Adjustable hose bumper
- · Multi-fit bracket for wall, ceiling or under counter mounting
- Material: Epoxy coated steel open reel and wall bracket

Product Compliance:

• NSF 61 Exempt (Non-Potable)

Warranty: One Year (Limited)

• Hose: One Year (Limited)

Performance Data:

- Air/Water Pressure: 300 psi [20.68 bar] Max
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate: 5.31 GPM [20.1 l/min] @ 60 psi [4.14 bar]

(Outlet Device &/or Final Configuration May Reduce Performance Ratings)





