

Epoxy Coated Retractable Hose Reels


TAG:


5HR-242


Open Epoxy Coated Steel Hose Reel

Architect/Engineering Specifications:

Open epoxy coated steel hose reel, 3/8" x 50' hose, ratcheting system, multi-fit bracket, adjustable hose bumper and 3/8" NPT female inlet and 3/8" NPT male outlet.





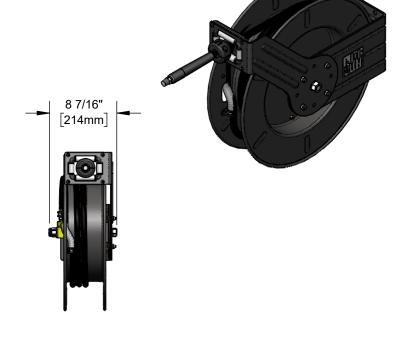

Features & Benefits:

- · Open epoxy coated hose reel
- 3/8" x 50' hose
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 3/8" NPT female inlet
- 3/8" NPT male outlet
- · Adjustable hose bumper
- Multi-fit bracket for wall, ceiling or under counter mounting
- · Material: Epoxy coated steel open reel and wall bracket

Product Compliance:

NSF 61 Exempt (Non-Potable)

Warranty: One Year (Limited)

Hose: One year (Limited)

Performance Data:

• Air/Water Pressure: 300 psi Max [20.68 bar]

• Temperature: 40°F - 140°F [4.44°C - 60°C]

Flow Rate: 5.31 GPM [20.1 l/min] @ 60 psi [4.14 bar]

(Outlet Device &/or Final Configuration May Reduce Performance Ratings)









Date: 10/18/24