



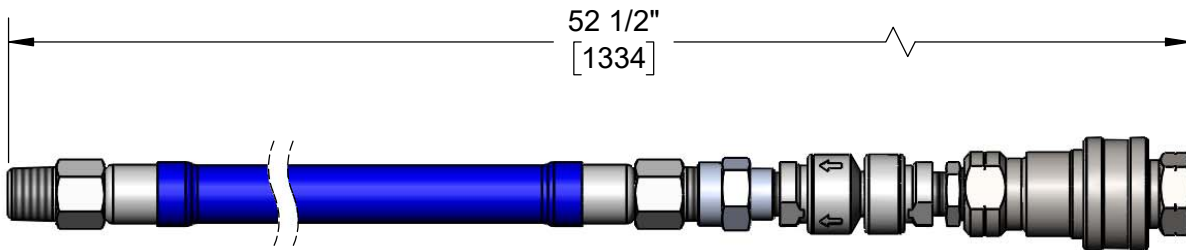

Architect/Engineering Specifications:

48" coated water connector hose (blue) with 1/2" NPT male outlet, 1/2" NPT female inlet, vacuum breaker and quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9 and NSF 372.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

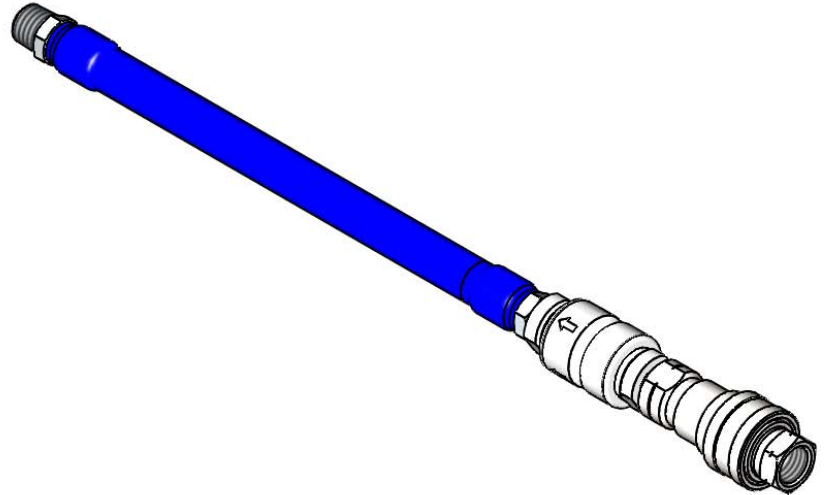

Features & Benefits:

- 48" coated water connector hose (blue)
- 1/2" NPT male welded fitting ends
- 3/8" NPT vacuum breaker
- 1/2" NPT female quick disconnect
- 1/2" NPT male outlet
- 1/2" NPT female inlet
- Extruded coating
- Stainless steel braided hose
- Material: Extruded coated stainless steel braids

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)
- CSA B64.8 (VB)

Warranty: Five Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 175 °F [4.44 °C - 79.44 °C]
- Flow Rate: 7.27 GPM [27.52 L/min] @ 60 psi [4.14 bar]

