




**Architect/Engineering Specifications:**

7 5/8" rigid gooseneck with plain end outlet. Certified to ASME A112.18.1/CSA B125.1, MSF 61-Section 9 and NSF 372

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

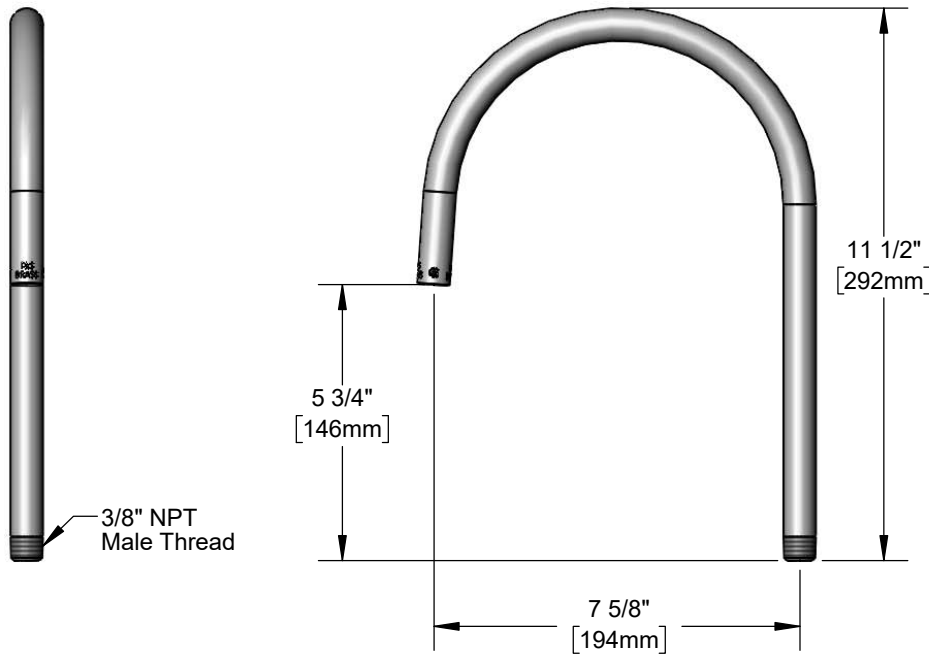

**Features & Benefits:**

- 7 5/8" rigid gooseneck
- Plain end outlet
- Fits all T&S rigid outlet faucets
- Material: Chrome plated brass tubular spout

**Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)

**Warranty:** One Year (Limited)

**Performance Data:**

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 99.6 °C]
- Flow Rate: 26.30 GPM [ 60 l/min] @ 60 psi [4.14 bar]

