

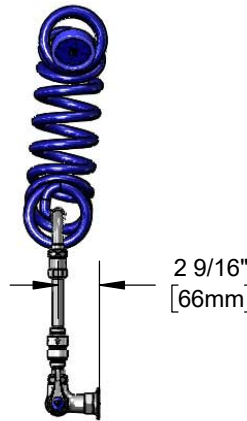


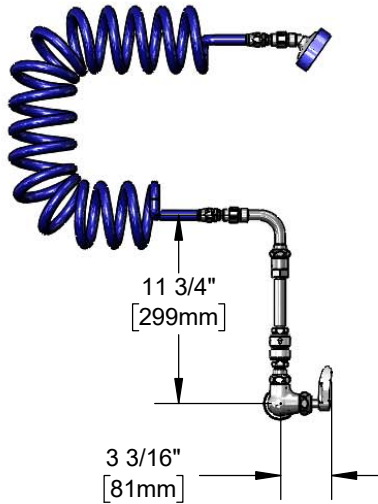

Architect/Engineering Specifications:

Single hole, single temperature wall mount faucet with polished chrome plated brass body, ceramic cartridge with check valve, lever handle, vacuum breaker, 9 ft coiled hose with angled high flow spray head and 1/2" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1 and CSA B64.8.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

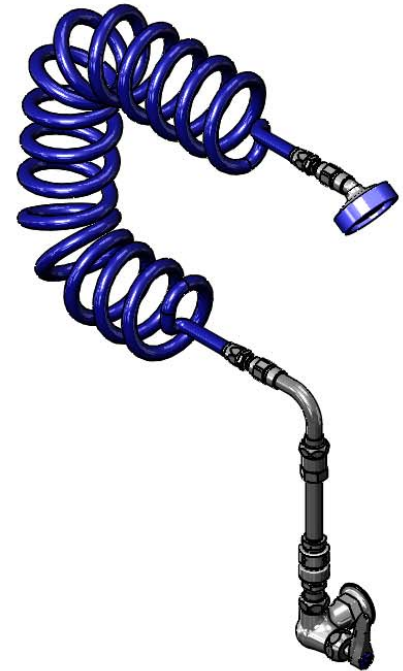

Features & Benefits:

- Single hole, single temperature faucet w/ chrome plated brass body
- Quarter-turn Cerama cartridge w/ check valve
- Lever handle w/ color coded index
- Continuous pressure vacuum breaker
- 9 ft coiled hose w/ angled high flow spray head
- 1/2" NPT female inlet
- Materials: Chrome plated body & spray head, chrome plated metal handle and polyurethane hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- CSA B64.8 (VB)



Warranty: One Year (Limited)

- Cerama Cartridge: Lifetime (Limited)

Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: 2.89 GPM @ 60 psi

Optional Handles

- 4" Wrist Action
- Lever (Standard)
- 4-Arm

Optional Cartridges With Checks

- Quarter-Turn Cerama w/ Check Valve (Standard)
- Quarter-Turn Eterna w/ Spring Check

