




Architect/Engineering Specifications:

Single hole single temperature deck mount faucet with PVC body, 6" rigid gooseneck with serrated tip outlet, dual operation handle and 3/8" NPT female inlet. Certified to ASME A112.18.1/CSA B125.1. Meets ADA ANSI/ICC A117.1 requirements.

Job Name _____
 Model Specified _____ Quantity _____
 Variations Specified _____
 Date _____

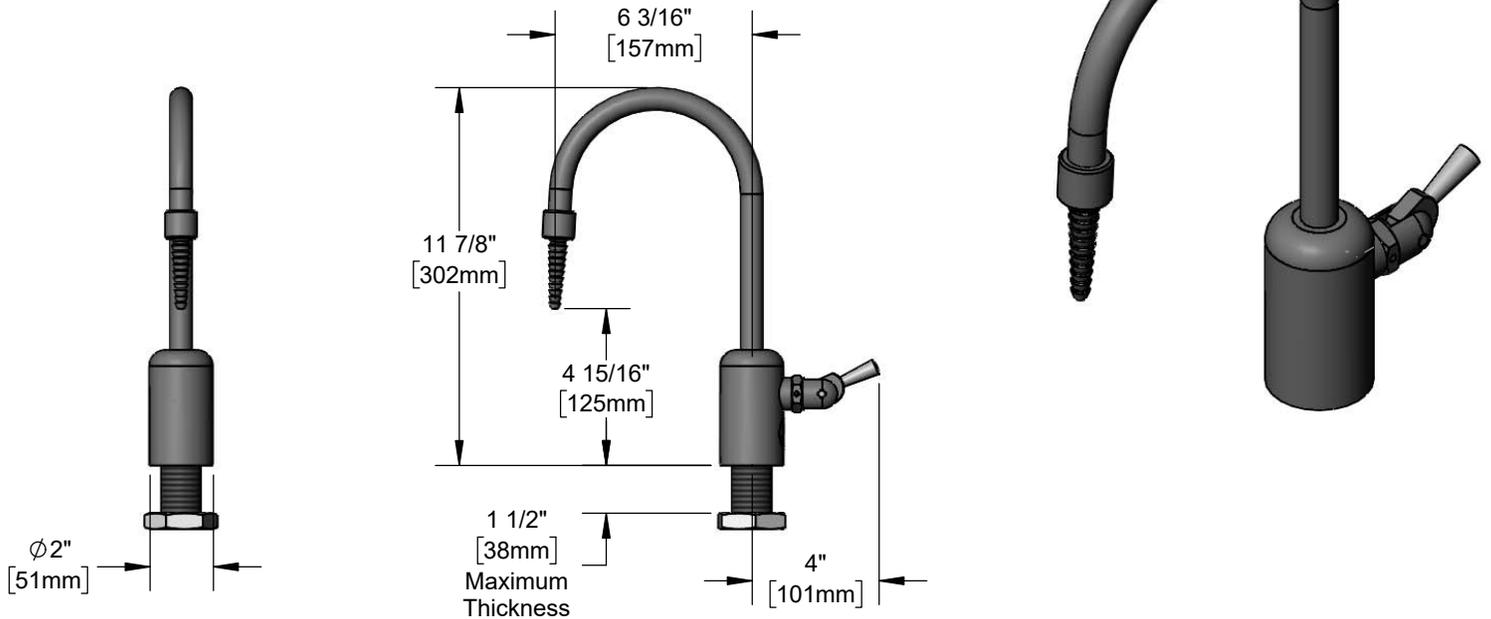

Features & Benefits:

- Single hole single temperature deck mount faucet w/ PVC body
- 6" rigid gooseneck
- Serrated tip outlet, Series 2
- Dual operation handle:
 - Pull handle down for self-closing feature
 - Pull up for manual On-Off control
- Black handle w/ color coded index (Stamped "DW" for distilled water)
- 3/8" NPT female inlet
- Material: PVC body & tubular spout and plastic handle

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Exempt (Non-Potable)
- ANSI A117.1 (ADA)



Warranty: One Year (Limited)

Performance Data:

- Pressure: 20 - 125 psi [1.38 - 8.62 bar]
- Temperature: 40 °F - 140 °F [4.44 °C - 60 °C]
- Flow Rate: 4.07 GPM [15.41 L/min] @ 60 psi [4.14 bar]

