


Easy Install Pre-Rinse Unit

#### **Architect/Engineering Specifications:**

Single hole deck mount mixing faucet with polished chrome plated brass body, 24" riser, 44" flexible stainless steel hose with heat resistant handle, 1.07 GPM spray valve, ceramic cartridges with check valves, lever handles, 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" compression connections, 6" adjustable wall bracket, spray valve holder and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

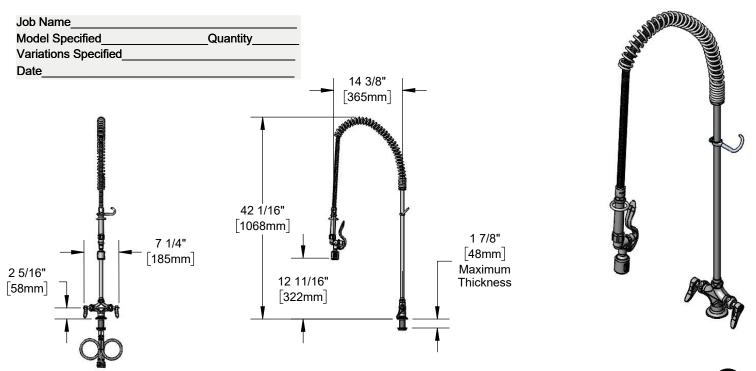

## Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- EasyInstall riser for quick installation
- 44" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 1.07 GPM spray valve
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 18" flexible stainless steel supply hoses w/ 1/2" NPSM / 5/8" compression connections
- 6" adjustable wall bracket
- Material: Polished chrome plated brass body, riser & spray valve, stainless steel hose and chrome plated metal handles

### **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Class II

## Warranty: Three Year (Limited)

Cerama Cartridge: Lifetime (Limited)

## **Performance Data:**

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F

Flow Rate: 1.07 GPM @ 60 psi

#### **Optional Handles**

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

# **Optional Cartridges With Checks**

- ☐ Quarter-Turn Cerama w/ Check Valve (Standard)
- □ Quarter-Turn Eterna w/ Spring Check

#### **Optional Pre-Rinse Spray Valves**

- □ B-0107 (1.15 GPM)
- □ B-0107-C (0.65 GPM)
  □ B-0107-J (1.07 GPM) (Standard)
- □ B-0108 (1.07 GPM)
- □ B-0108-C (0.65 GPM)









