Swivel Sink and Pantry Faucets B-0200-44H-VB


TAG:

Double Pantry Washdown Faucet

Architect/Engineering Specifications:


Single hole deck mount mixing faucet with polished chrome plated brass body, 90° swivel adapter, 3/8" NPT vacuum breaker, 44" flexible stainless steel hose, heat resistant handle, 1.15 GPM angled spray valve, compression cartridges with spring checks, lever handles, 18" flexible stainless steel supply hoses w/ 1/2" NPSM male inlets and wall hook. ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

Job Name	
Model Specified	Quantity
Variations Specified	· · · · · · · · · · · · · · · · · · ·
Date	



Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- 90° swivel adapter
- 3/8" NPT vacuum breaker
- 44" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 1.15 GPM angled spray valve
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- 18" flexible stainless steel supply hoses w/ 1/2" NPSM male inlets
- Wall hook holds spray valve when not in use
- Material: Polished chrome plated brass body, spray valve body & tubular adapter, stainless steel hose and chrome plated metal handles

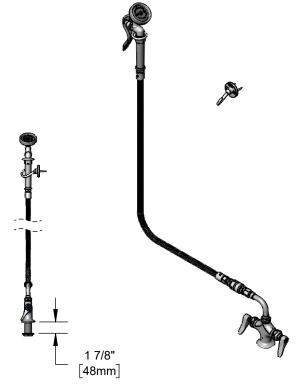

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Class II
- CSA B64.8

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi [1.38 - 8.62 bar]

Temperature: 40°F - 140°F [4.44°C - 60°C]

Flow Rate: 1.15 GPM [4.35 L/min] @ 60 psi [4.14 bar]

Optional Handles Optional Cartridges With Checks

- ☐ 4" Wrist Action □ Quarter-Turn Cerama w/ Check Valve
 - □ Quarter-Turn Eterna w/ Spring Check (Standard)
- □ Lever (Standard)

Optional Pre-Rinse Spray Valves

- □ B-0107 (1.15 GPM)
- □ B-0107-C (0.65 GPM)
- □ B-0107-J (1.07 GPM)
- □ B-0108 (1.07 GPM)
- □ B-0108-C (0.65 GPM)



□ 4-Arm







