





Architect/Engineering Specifications:

84" flexible stainless steel hose, 3/4-14 UN female outlet, 3/4-14 UN female inlet and washers. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372.

Job Name \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Quantity \_\_\_\_\_  
 Variations Specified \_\_\_\_\_  
 Date \_\_\_\_\_

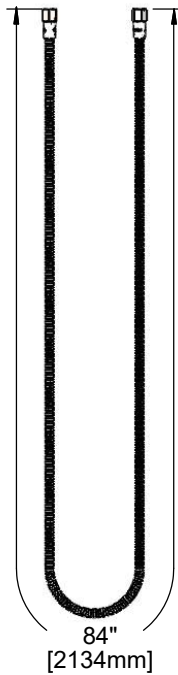

Features & Benefits:

- 84" flexible stainless steel hose
- Polyurethane inner tubing
- 3/4-14 UN female inlet
- 3/4-14 UN female outlet
- (2) washers included
- Material: Polished chrome plated brass end fittings, and stainless steel hose

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 - Section 9
- NSF 372 (Low Lead Content)



Warranty: Three Year (Limited)



Performance Data:

- Pressure: 20 - 125 psi
- Temperature: 40 °F - 140 °F
- Flow Rate: TBD GPM @ 60 psi

