
Easy Install Pre-Rinse Unit

Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, 18" riser, 44" flexible stainless steel hose with heat resistant handle and pre-rinse swivel, 1.07 GPM spray valve, ceramic cartridges with check valves, lever handles, accessory fitting tee and 1/2" NPT female inlets, 6" adjustable wall bracket, spray valve holder and overhead spring. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class II compliant.

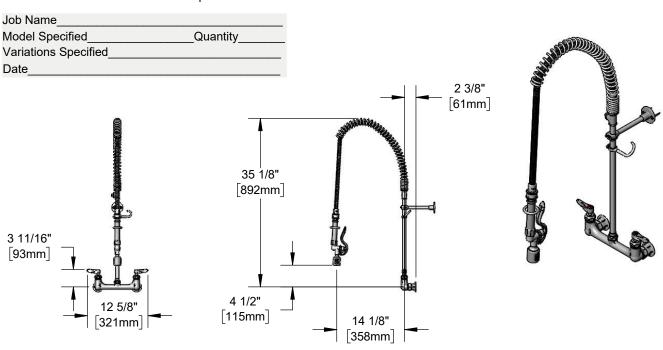

Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- EasyInstall 18" riser for easy installation
- 44" flexible stainless steel hose w/ heat resistant gray handle, pre-rinse swivel and hold down ring
- 1.07 GPM spray valve
- Quarter-turn Cerama cartridges w/ check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- Accessory fitting tee
- 1/2" NPT female eccentric inlets with \emptyset 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- 6" adjustable wall bracket
- Material: Polished chrome plated brass body, tubular nozzle, add-on faucet, riser & spray valve body, stainless steel hose and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Class II

Warranty: Three Year (Limited)

Cerama Cartridge: Lifetime (Limited)

Performance Data:

Pressure: 20 - 125 psi

Temperature: 40 °F - 140 °F

Flow Rate: 1.07 GPM @ 60 psi



Optional Pre-Rinse Spray Valves

- □ B-0107 (1.15 GPM)
 □ B-0107-C (0.65 GPM)
 □ B-0107-J (1.07 GPM) (Standard)
- □ B-0108 (1.07 GPM)
- □ B-0108-C (0.65 GPM)

Optional Cartridges With Checks

- ☐ Quarter-Turn Cerama w/ Check Valve (Standard)
- ☐ Quarter-Turn Eterna w/ Spring Check

Optional Handles

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm







T&S BRASS AND BRONZE WORKS, INC.



