


# Easy Install Pre-Rinse Unit

#### **Architect/Engineering Specifications:**

8" wall mount mixing faucet with polished chrome plated brass body, 18" riser, 44" flexible stainless steel hose with heat resistant handle, 0.65 GPM low flow spray valve, ceramic cartridges with check valves, lever handles, 1/2" NPT female inlets, spray valve holder, overhead spring, 12" wall bracket and 1/2" NPT male supply nipples. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. 2019 DOE PRSV - Class I compliant.

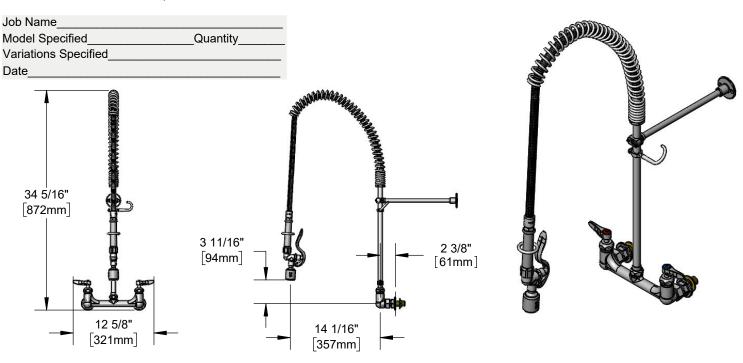

#### Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- EasyInstall 18" riser for quick installation
- 44" flexible stainless steel hose w/ heat resistant gray handle and hold down ring
- 0.65 GPM low flow spray valve
- Quarter-turn Cerama cartridges with check valves to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- 1/2" NPT male supply nipple kits
- Adjustable centers from 7 3/4" to 8 1/4"
- 12" wall bracket
- Material: Polished chrome plated brass body, riser & spray valve body, stainless steel hose, and chrome plated metal handles

## **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- 2019 DOE PRSV Class I

Warranty: One Year (Limited)

Cerama Cartridge: Lifetime (Limited)

#### **Performance Data:**

Pressure: 20 - 125 psi Temperature: 40 °F - 140 °F Flow Rate: 0.65 GPM @ 60 psi



#### **Optional Handles**

- □ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm

# **Optional Cartridges With Checks**

- □ Quarter-Turn Cerama w/ Check Valve (Standard)
- □ Quarter-Turn Eterna w/ Spring Check

### Optional Pre-Rinse Spray Valves

- □ B-0107 (1.15 GPM)
  □ B-0107-C (0.65 GPM) (Standard)
- □ B-0107-J (1.07 GPM)
- □ B-0108 (1.07 GPM)
- □ B-0108-C (0.65 GPM)







