
Workboard Mixing Faucet

Architect/Engineering Specifications:

4" deck mount mixing faucet with chrome plated brass body, 8" swing nozzle with 2.2 GPM aerator, compression cartridges with spring checks, lever handles, 1/2" NPT male inlets, chrome plated escutcheon and sidespray with 7 ft. hose and hose guide. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

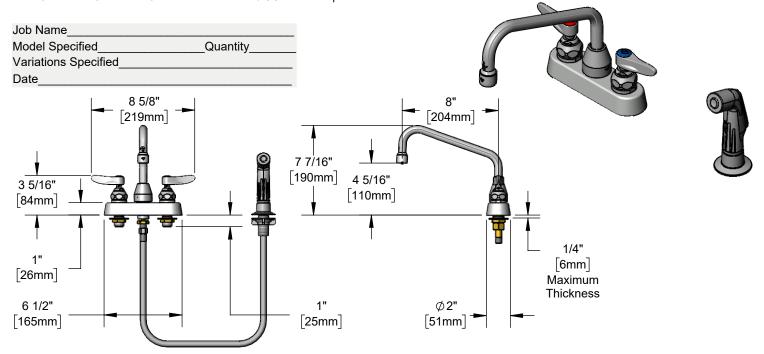

Features & Benefits:

- 4" deck mount mixing faucet w/ chrome plated brass body
- 8" swing nozzle
- 2.2 GPM, Series 1 (B-0199-01)
- Quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes
- 1/2" NPT male inlets
- Tailpieces and nuts for 1/4" NPT male connections
- Chrome plated escutcheon
- · Sidespray with 7 ft. vinyl hose and hose guide
- Material: Chrome plated brass body & tubular spout, chrome plated thermoplastic sidespray body and chrome plated metal handles & escutcheon

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)



ADA Compliant

Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 140°F [4.44°C 60°C]
- Flow Rate:

Nozzle: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar] Sidespray: 2.2 GPM [8.3 L/min] @ 60 psi [4.14 bar]



GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Handles
0.35	N/A	□ B-0199-01-N035	N/A	□ B-0199-06-N035	□ 4" Wrist Action
0.5	N/A	□ B-0199-01-N05	N/A	□ B-0199-06-N05	□ Lever (Standard)
1.0	□ B-0199-01-F10	N/A	□ B-0199-06-F10	N/A	Optional Cartridges With Checks
1.5	□ B-0199-01-WS	□ B-0199-29	□ B-0199-06-WS	□ B-0199-29VR	Optional Cartriages With Offecks
2.2	Standard	□ B-0199-21	□ B-0199-06	□ B-0199-21-VRF	□ Quarter-Turn Cerama w/ Check Valve
					□ Quarter-Turn Eterna w/ Spring Check (Standard)









