

# SAFETLINK Water Appliance Connector

### **Architect/Engineering Specifications:**

72" coated water connector hose (blue) with 3/8" NPT male outlet and 3/8" NPT female reverse quick-disconnect. Certified to ASME A112.18.1 / CSA B125.1, NSF 61- Section 9, NSF 372 and NSF 2.

Job Name\_\_\_\_\_\_Quantity\_\_\_\_\_
Variations Specified\_\_\_\_\_\_Date\_\_\_\_\_

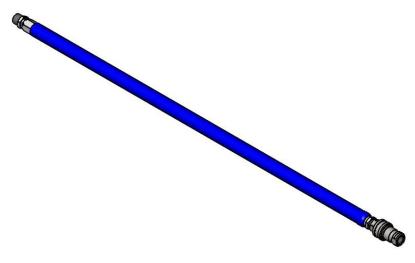







#### Features & Benefits:

- 72" coated water connector hose (blue)
- 3/8" NPT male welded fitting ends
- 3/8" NPT female reverse quick disconnect
- Extruded coating
- · Stainless steel braided hose
- Material: Extruded coated stainless steel braids

## **Product Compliance:**

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- NSF 2

Warranty: Five Year (Limited)

#### **Performance Data:**

Pressure: 20 - 125 psi
 Temperature: 40 °F - 175 °F
 Flow Rate: 9.97 GPM @ 60 psi







