
TAG:	


# Pot and Kettle Filler

### Architect/Engineering Specifications:

8" wall mount mixing faucet with polished chrome plated brass body, compression cartridges with spring checks, lever handles, continuous pressure vacuum breaker, 68" flexible stainless steel hose with heat resistant handle, quick connect self-closing squeeze valve, hook nozzle and 1.15 GPM spray head attachments, and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9, NSF 372 and ASSE 1056.

Job Name Model Specified Quantity Variations Specified Date



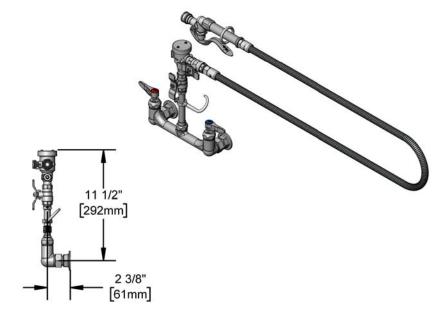


#### Features & Benefits:

- 8" wall mount mixing faucet w/ polished chrome plated brass body
- Quarter-turn Eterna compression cartridges with spring checks to prevent cross flow of water
- Continuous pressure vacuum breaker
- 68" flexible stainless steel hose w/ heat resistant gray handle
- Quick connect self-closing squeeze valve
- Quick connect hook nozzle
- Quick connect 1.15 GPM spray head
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets with Ø 2" flanges
- Adjustable centers from 7 3/4" to 8 1/4"
- Material: Polished chrome plated brass bodies & vacuum breaker, stainless steel hose, and chrome plated metal handles

## **Product Compliance:**





- NSF 372 (Low Lead Content)
- ASSE 1056 (VB)
- 2019 DOE PRSV Class II, B-1421 Only



Warranty: One Year (Limited)

#### Performance Data:



Pressure: 20 - 125 psi Temperature: 40°F - 140°F

Flow Rate:

Spray Valve: 1.15 GPM @ 60 psi Hook Nozzle: 3.68 GPM @ 60 psi

#### **Optional Cartridges With Checks**

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)

## Optional Pre-Rinse Spray Valves

- □ B-0107 (1.15 GPM)
- □ B-0107-C (0.65 GPM)
- □ B-0107-J (1.07 GPM)
- □ B-0108 (1.07 GPM)

#### □ B-0108-C (0.65 GPM)

#### **Optional Handles**

- ☐ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm











Date: 12/11/19