

Double Pantry Faucet

Architect/Engineering Specifications:

3 3/8" wall mount mixing faucet with polished chrome plated brass body, swivel outlet (less nozzle), compression cartridges with spring checks, lever handles and 1/2" NPT female inlets. Certified to ASME A112.18.1/CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

Job Name	
Model Specified	Quantity
Variations Specified	
Date	

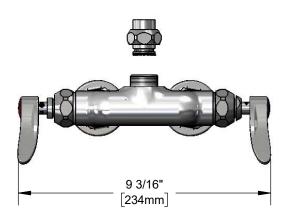

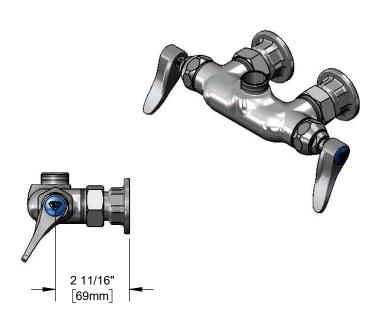

Features & Benefits:

- 3 3/8" wall mount mixing faucet with polished chrome plated brass body, less nozzle
- Swivel outlet accepts standard T&S swing nozzles
- Includes EZ-K kit to convert rigid risers to EasyInstall
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent crossflow of water
- Lever handles w/ color coded indexes
- 1/2" NPT female eccentric inlets w/ \emptyset 2" flanges
- Adjustable centers from 3 1/8" to 3 5/8"
- Material: Polished chrome plated brass body & chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)



Performance Data:

Pressure: 20 - 125 psi Temperature: 40 °F -140 °F

Flow Rate: 16.90 GPM @ 60 psi

(Outlet Device &/or Final Configuration May Reduce Flow Rate)



T&S Swing Nozzles

- □ 059X 6" Swing Nozzle
- □ 060X 8" Swing Nozzle □ 061X 10" Swing Nozzle
- □ 062X 12" Swing Nozzle
- □ 063X 14" Swing Nozzle
- □ 064X 16" Swing Nozzle
- □ 065X 18" Swing Nozzle
 □ 066X 12" Double Joint Swing Nozzle
- □ 067X 15" Double Joint Swing Nozzle
- □ 068X 18" Double Joint Swing Nozzle □ 069X 24" Double Joint Swing Nozzle

T&S Swivel Goosenecks (D x K)

- □ 131X 2 13/16" x 2 9/16" Swivel Gooseneck
- ☐ 132X 2 5/8" x 5 7/16" Swivel Gooseneck
- ☐ 133X 5 11/16" x 6 1/4" Swivel Gooseneck
- □ 135X 8 3/4" x 5 5/8" Swivel Gooseneck

Optional Cartridges With Checks

- □ Quarter-Turn Cerama w/ Check Valve
- □ Quarter-Turn Eterna w/ Spring Check (Standard)

Optional Handles

- □ 4" Wrist Action
- □ Lever (Standard)
- □ 4-Arm









