
TAG:

Double Pantry Faucet

Architect/Engineering Specifications:

Single hole deck mount mixing faucet with polished chrome plated brass body, 8 13/16" swivel/rigid gooseneck with 2.2 GPM vandal resistant aerator, compression cartridges with spring checks, lever handles with vandal resistant screws and 18" flexible stainless steel supply hoses with 1/2" NPSM / 5/8" O.D. compression connections. Certified to ASME A112.18.1 / CSA B125.1, NSF 61-Section 9 and NSF 372. Meets ADA ANSI/ICC A117.1 requirements.

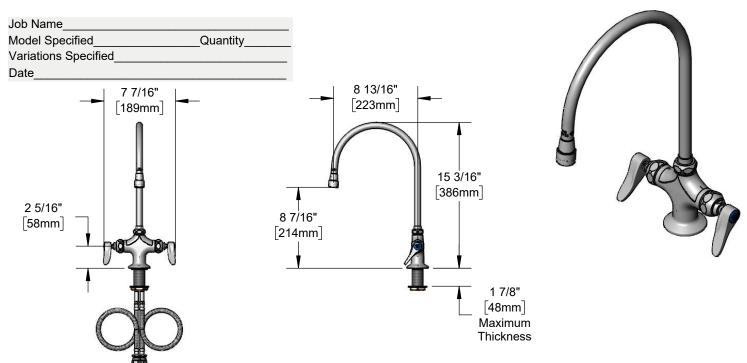

Features & Benefits:

- Single hole deck mount mixing faucet w/ polished chrome plated brass body
- 8 13/16" swivel/rigid gooseneck
- · Includes lock washer to convert to rigid
- 2.2 GPM vandal resistant aerator, Series 7 (B-0199-07)
- Quarter-turn Eterna compression cartridges w/ spring checks to prevent cross flow of water
- Lever handles w/ color coded indexes & vandal resistant screws
- 18" flexible stainless steel supply hoses w/ 1/2" NPSM / 5/8" O.D. compression connections
- Material: Polished chrome plated brass body & tubular spout, and chrome plated metal handles

Product Compliance:

- ASME A112.18.1 / CSA B125.1
- NSF 61 Section 9
- NSF 372 (Low Lead Content)
- ANSI A117.1 (ADA)

Warranty: One Year (Limited)

Performance Data:

Pressure: 20 - 125 psi
 Temperature: 40 °F - 140 °F
 Flow Rate: 2.2 GPM @ 60 psi







Optional Outlets (Series 2 / VR Series 7)

GPM	Aerated	Non-Aerated (Laminar)	VR Aerated	VR Non-Aerated (VR Laminar)	Optional Handles
0.35	N/A N/A	□ B-0199-02-N035 □ B-0199-02-N05	N/A N/A	□ B-0199-07-N035 □ B-0199-07-N05	□ 4" Wrist Action □ Lever (Standard) □ 4-Arm
1.0 1.2	□ B-0199-02-F10 □ B-0199-02-F12	N/A	□ B-0199-07-F10 □ B-0199-07-F12	N/A	Optional Cartridges
1.5 2.2	□ B-0199-02-WS □ B-0199-02	N/A N/A	□ B-0199-07-WS Standard	N/A N/A	☐ Quarter-Turn Cerama w/ Check Valve☐ Quarter-Turn Eterna w/ Spring Checks (Standard)







T&S BRASS AND BRONZE WORKS, INC.

