


Stainless Steel Retractable Hose Reels

EU-7133

Open Stainless Steel Hose Reel

Architect/Engineering Specifications:

Open stainless steel hose reel, chrome plated brass quick disconnect with 1/2" NPT male outlet, 1/2" x 35' [12.7mm x 10.67m] heavy-duty non-marking hose, ratcheting system, multi-fit bracket, adjustable hose bumper, easy install stainless steel wall bracket with reel-to-bracket mounting hardware and 1.5m flexible stainless steel supply hose with 1/2" BSPP female inlet. CE Certified Mark-EU Directives.

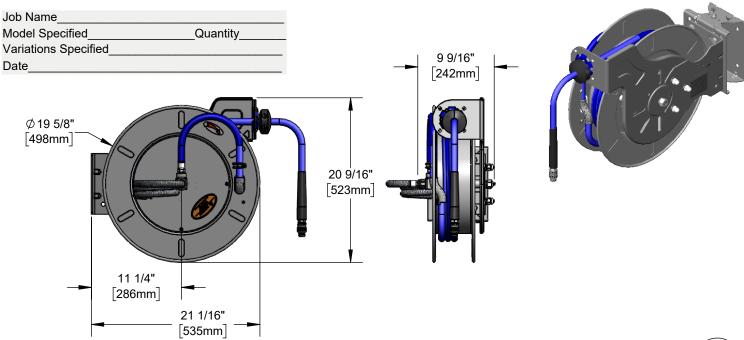

Features & Benefits:

- Open stainless steel hose reel
- Chrome plated brass quick disconnect with 1/2" NPT male outlet
- 1/2" x 35' [12.7mm x 10.67m] heavy-duty non-marking hose rated to 300 PSI [20.68 bar]
- Ratcheting system holds the length of hose until a slight tug to retract automatically
- 1.5m flexible stainless steel supply hose with 1/2" BSPP female inlet
- Adjustable hose bumper
- EasyInstall stainless steel hose reel swing bracket with reel-to-bracket mounting hardware
- Multi-fit bracket for wall, ceiling or under counter mounting
- Material: Stainless steel open reel, supply hose and swing bracket & chrome plated brass quick disconnect

Optional Hose Reel Spray Valve

☐ EMV-0522-24 Brass Front Trigger Water Gun

Product Compliance:

- NSF 61 Exempt (Non-Potable)
- CE Certified Mark EU Directives

Warranty: Two Year (Limited)

Hose: One Year (Limited)

Performance Data:

- Pressure: 20 125 psi [1.38 8.62 bar]
- Temperature: 40°F 200°F [4.44°C 93.33°C]
- Flow Rate: 8.42 GPM [29.87 I/min] @ 60 psi [4.14 bar]

Optional Hose Reel Multi-Fit Brackets 1/2" [12.7mm] Stainless Steel Hose Reel

Deck Mount Pivot Bracket □ G016652-45

□ G018477-45 Stainless Steel Table Leg Swing Bracket









